


PIN	SYMBOL
1	LED-K
2	LED-A(5V)
3	VSS
4	VDD(5V)
5	V0
6	RS
7	RW
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7

### SPECIFICATIONS:

- |                           |                                     |
|---------------------------|-------------------------------------|
| 1. DISPLAY TYPE:          | STN / POSITIVE (YG) / TRANSFLECTIVE |
| 2. DRIVE IC:              | AIP31066 or EQV.                    |
| 3. CONNECTOR:             | ZEBRA                               |
| 4. OPERATING VOLTAGE:     | VOP = 4.5 V, VDD = 5.0V             |
| 5. OPERATING TEMPERATURE: | -20 ~ 70°C                          |
| 6. STORAGE TEMPERATURE:   | -30 ~ 80°C                          |
| 7. DRIVE MODE:            | 1/16 DUTY, 1/5 BIAS                 |
| 8. VIEWING ANGLE:         | 6 O'CLOCK                           |
| 9. BACKLIGHT:             | YELLOW-GREEN LED, I = 110mA         |
| 10. CUSTOMER PART NO.:    | BOCEN STANDARD PRODUCT              |

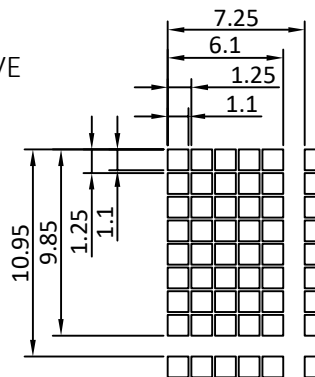


### BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BB2002-02

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2011-12-2