
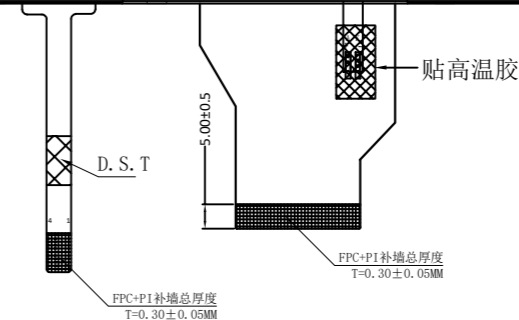
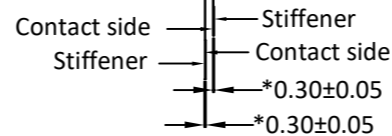


PIN	SYMBOL
1	XL
2	YD
3	XR
4	YU


SPECIFICATIONS:

- | | |
|---------------------------|--|
| 1. DISPLAY TYPE: | 7.0" / 800*480 |
| 2. DRIVE IC: | SOURCE IC: EK9716BD4 + GATE IC: EK73002AB2 |
| 3. OPERATING TEMPERATURE: | -10 ~ 60°C |
| 4. STORAGE TEMPERATURE: | -20 ~ 70°C |
| 5. VIEWING ANGLE: | 12 O'CLOCK |
| 6. BACKLIGHT: | 24 WHITE LED, 9V, 160mA |
| 7. BRIGHTNESS: | 350 CD/M2 (TYP.) |
| 8. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |




PIN	SYMBOL
1~2	LED-A
3~4	LCD-K
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12~19	B7~B0
20~27	G7~G0
28~35	R7~R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RSTB
45	NC
46	VCOM
47	DITHB
48	GND
49~50	NC

LED CIRCUIT DIAGRAM:

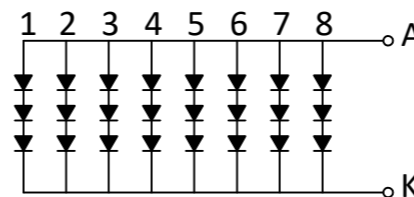

VF=9V, IF=160MA



Resistive Touch Panel Circuit


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF7050-01R

VERSION: 1.0

CHECKED BY: William

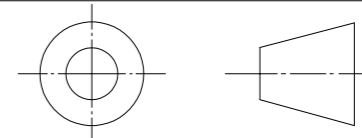

NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2022-3-15