


INTERFACE	
1	VBL-
2	VBL+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	NC
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

SPECIFICATIONS:

- 1. DISPLAY TYPE: 4.3"/ TN / 480*272
- 2. DRIVE IC: ST7282
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. VIEWING ANGLE: 6 O' CLOCK
- 6. BACKLIGHT: 10 WHITE LED, 40mA
- 7. BRIGHTNESS: 320 CD/M2 (MIN)
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

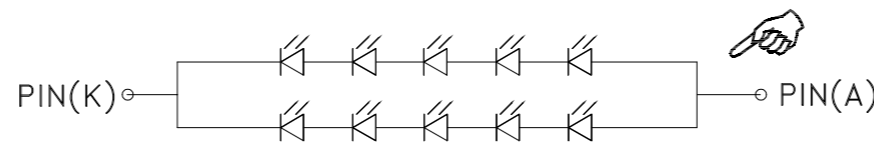


BOCCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF4340-01R

VERSION: 1.0

CHECKED BY: William

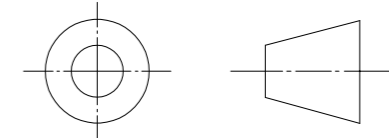

NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2021-6-3