

INTERFACE	
1	VBL-
2	VBL+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

**SPECIFICATIONS:**

- |                           |                               |
|---------------------------|-------------------------------|
| 1. DISPLAY TYPE:          | 4.3" / TN / 480*272           |
| 2. DRIVE IC:              | ST7282                        |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C                    |
| 4. STORAGE TEMPERATURE:   | -30 ~ 80°C                    |
| 5. VIEWING ANGLE:         | 12 O' CLOCK                   |
| 6. BACKLIGHT:             | 10 WHITE LED, 15.5±1.0V, 40mA |
| 7. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT        |

**B/L CIRCUIT DIAGRAM**


**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn

**BF4340-04A**

VERSION: 1.0

CHECKED BY: William

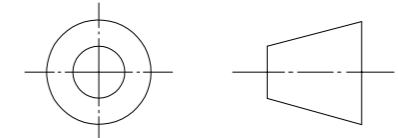

NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2022-3-15