
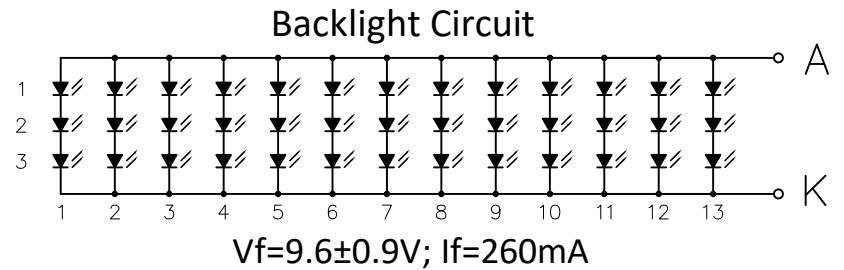


PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	NC
6	NC
7	GND
8	Rxin0-
9	Rxin0+
10	GND
11	Rxin1-
12	Rxin1+
13	GND
14	Rxin2-
15	Rxin2+
16	GND
17	RxinCLK-
18	RxinCLK+
19	GND
20	Rxin3-
21	Rxin3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	LED_PWM
28	NC
29	AVDD
30	GND
31	LED-
32	LED-
33	NC
34	NC
35	VGL
36	NC
37	CABC_CE
38	VGH
39	LED+
40	LED+

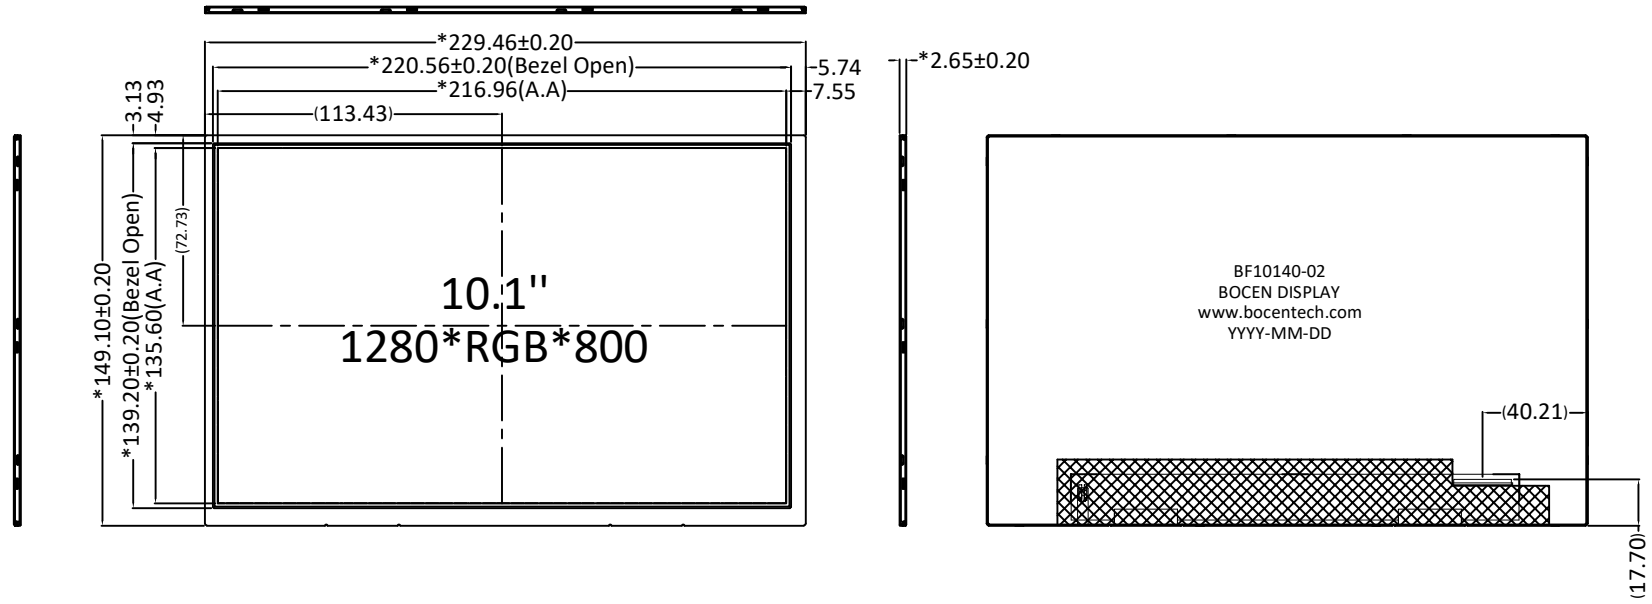

SPECIFICATIONS:

- | | |
|---------------------------|-----------------------------|
| 1. DISPLAY TYPE: | 10.1" / 1280x800 |
| 2. STRUCTURE: | LCD+IC+FPC+BL+BZ |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C |
| 4. STORAGE TEMPERATURE: | -30 ~ 80°C |
| 5. VIEWING ANGLE: | ALL |
| 6. BACKLIGHT: | 13x3 LED, Vf=9.6V, If=260mA |
| 7. BRIGHTNESS: | 350 CD/M ² (TYP) |
| 8. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Shawn	BF10140-02	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2017-11-6