


(BL CIRCUIT DIAGRAM)

If=60mA Vf=3.2V

LCM ID CIRCUIT:

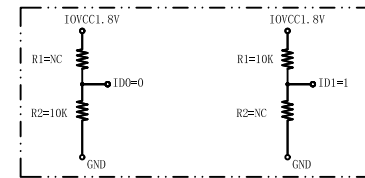

PIN	DESCRIPTION
1	LED+
2	LED-
3	VDD_2V8
4	VDD_1V8
5	GND
6	GND
7	SPI_RS
8	SPI_CLK
9	SPI_MOS/SDA
10	SPI_CS
11	SPI_MISO(NC)
12	NC
13	RST
14	GND
15	GND
16	NC
17	NC
18	ID0
19	ID1
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC

SPECIFICATIONS:

- | | |
|---------------------------|-------------------------|
| 1. DISPLAY TYPE: | 2.0" TFT / TN |
| 2. DRIVE IC: | ST7775R |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C |
| 4. STORAGE TEMPERATURE: | -30 ~ 80°C |
| 5. VIEWING ANGLE: | 6 O'CLOCK |
| 6. BACKLIGHT: | 3 LED / Parallel / 60mA |
| 7. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF2025-01

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2020-3-20