
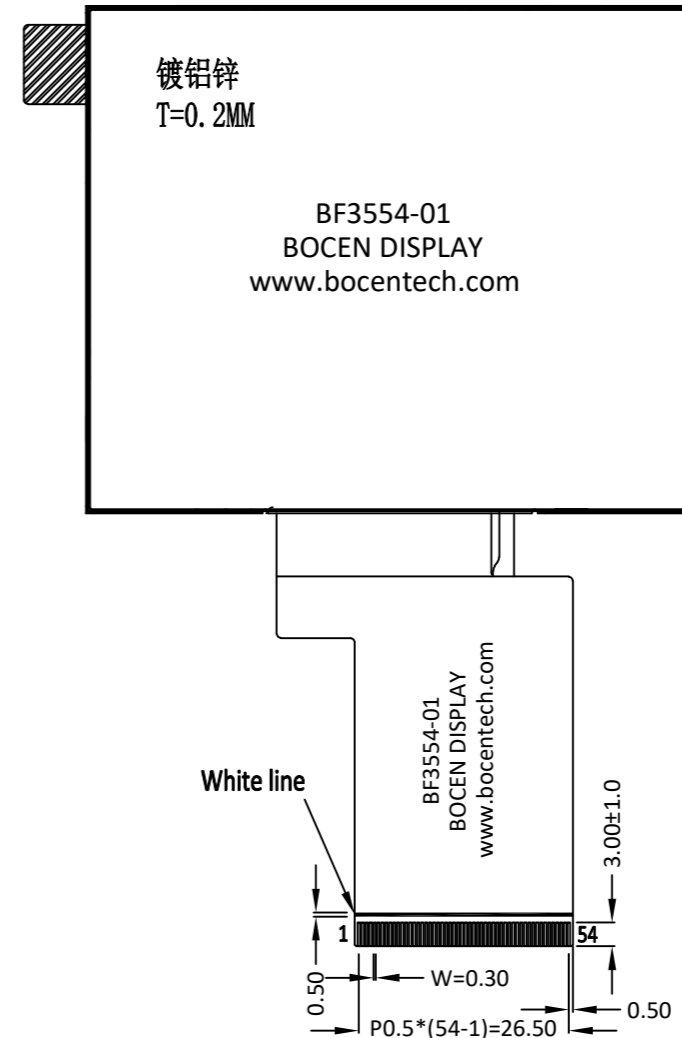
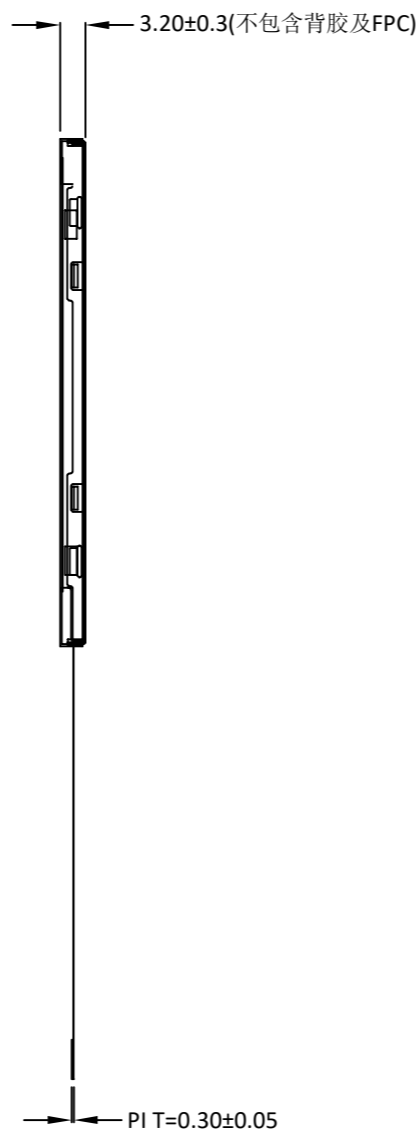


Revised Record


1.0 2022-03-07 New Issue

PIN	SYMBOL
1	LEDK
2	LEDK
3	LEDA
4	LEDA
5	YU
6	XL
7	NC
8	RESET
9	SPENA
10	SPCLK
11	SPDAT
12	B0
13	B1
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7
36	HSYNC
37	VSYNC
38	DCLK
39	NC
40	NC
41	VCC
42	VCC
43	YD
44	XR
45	NC
46	NC
47	NC
48	IF2
49	IF1
50	IFO
51	NC
52	DE
53	GND
54	GND

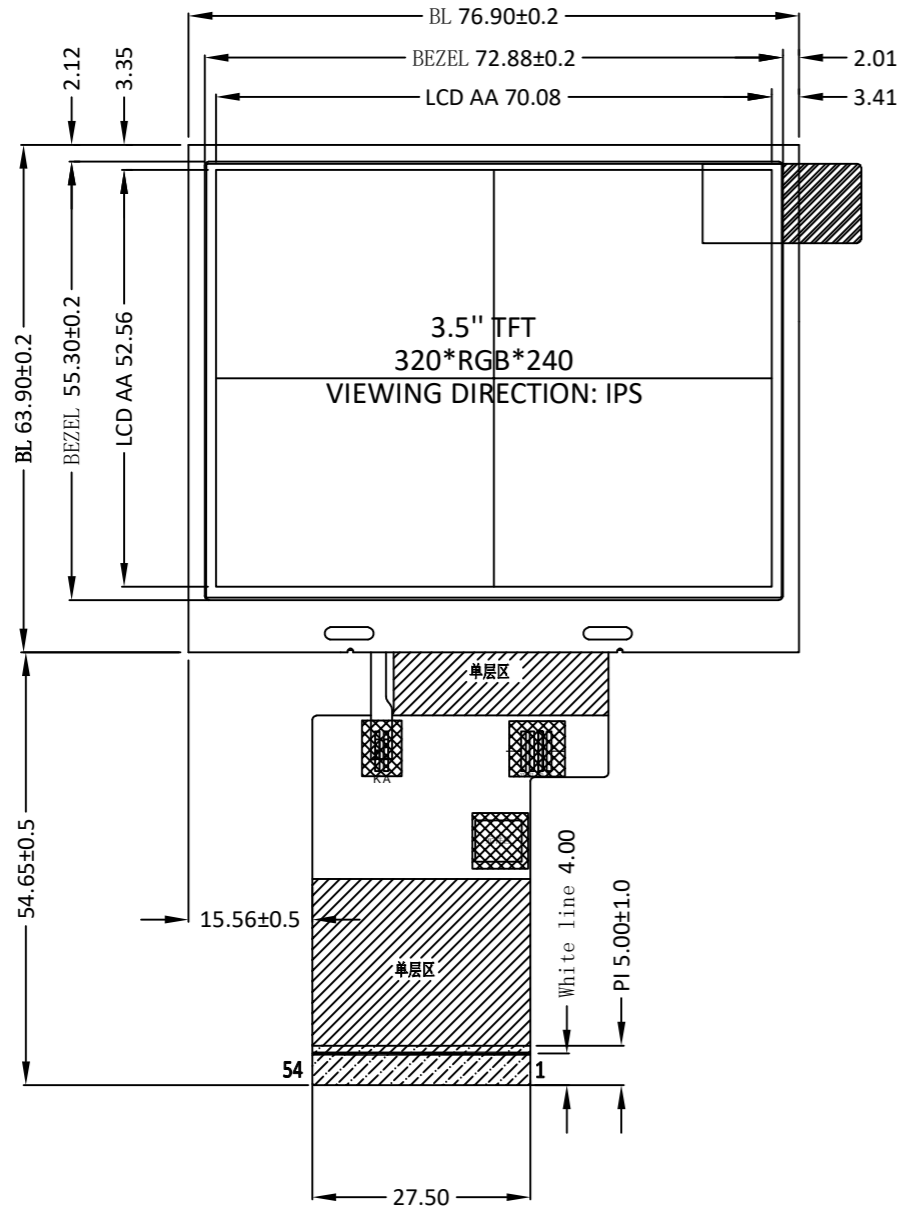

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: 3.5" / IPS / 320\*RGB\*240
- 2. DRIVE IC: ST7272A
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. VIEWING ANGLE: All
- 6. BACKLIGHT: 6 WHITE LED
- 7. UNDEFINED TOLERANCES: ±0.2
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

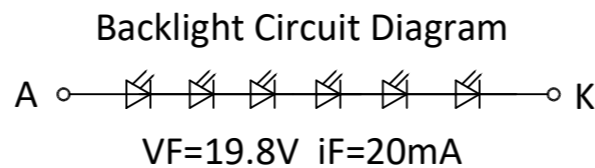

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BF3554-01</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2022-03-07