



RTP P=0.5X(6-1)=2.5

LCD P=0.5X(54-1)=26.5

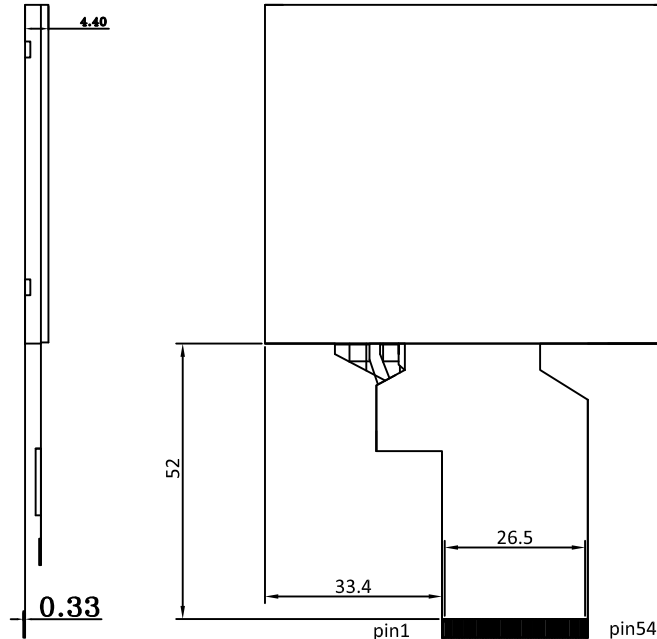

B/L CIRCUIT DIAGRAM

6PCS WHITE LED;IF =20mA,VF=18.0V

		PIN	NAME
40	NC	1	LED-K
41	VCC	2	LED-K
42	VCC	3	LED-A
43	Y2	4	LED-A
44	X2	5	Y1
45	NC	6	X1
46	NC	7	NC
47	NC	8	RESET
48	IF2	9	SPENA
49	IF1	10	SPCLK
50	IF0	11	SPDAT
51	NC	12	B0
52	DE	13	B1
53	GND	14	B2
54	GND	15	B3
		16	B4
		17	B5
		18	B6
		19	B7
		20	G0
		21	G1
		22	G2
		23	G3
		24	G4
		25	G5
		26	G6
		27	G7
		28	R0
		29	R1
		30	R2
		31	R3
		32	R4
		33	R5
		34	R6
		35	R7
		36	HSYNC
		37	VSYNC
		38	DCLK
		39	NC

### SPECIFICATIONS:

- |                           |                        |
|---------------------------|------------------------|
| 1. DISPLAY TYPE:          | 3.5" / Transmissive    |
| 2. DRIVE IC:              | HX8238D                |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C             |
| 4. STORAGE TEMPERATURE:   | -30 ~ 80°C             |
| 5. VIEWING ANGLE:         | All                    |
| 6. BACKLIGHT:             | LED/SERIES/20mA        |
| 7. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT |

PIN	Logic
1	VDD
2	SCL
3	SDA
4	INT
5	RST
6	GND


## BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

**BF3554-01R**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2019-04-21