


3.32(WITHOUT TOUCHPANEL)

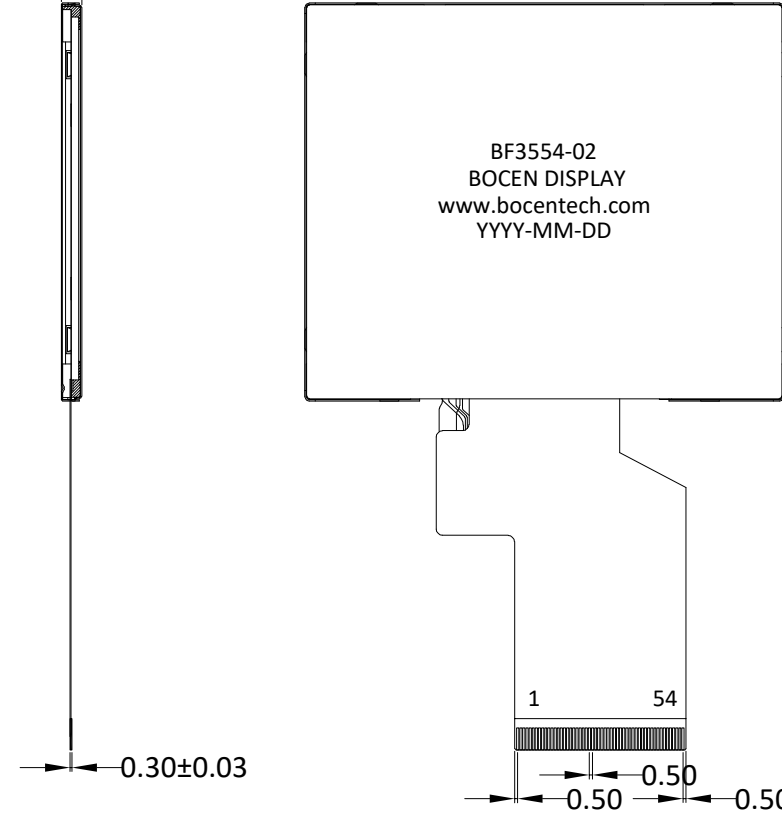


PIN	SYMBOL
1	LEDK
2	LEDK
3	LEDA
4	LEDA
5	NC
6	NC
7	NC
8	RESET
9	SPENA
10	SPCK
11	SPDA
12-19	B0-B7
20-27	G0-G7
28-35	R0-R7
36	HSYNC
37	VSYNC
38	DCLK
39-40	NC
41-42	VCC
43-47	NC
48	IF2
49	IF1
50	IF0
51	NC
52	DE
53-54	GND

SPECIFICATIONS:

1. DISPLAY TYPE: 3.5" TFT / TN / 320*240
2. DRIVE IC: HX8238D
3. OPERATING TEMPERATURE: -20 ~ 70°C
4. STORAGE TEMPERATURE: -30 ~ 80°C
5. VIEWING ANGLE: 12 O'CLOCK
6. BACKLIGHT: 6 WHITE LED
7. BRIGHTNESS: 300 CD/M2 (TYP.)
8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

LED CIRCUIT DIAGRAM



BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BF3554-02	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2021-7-1