

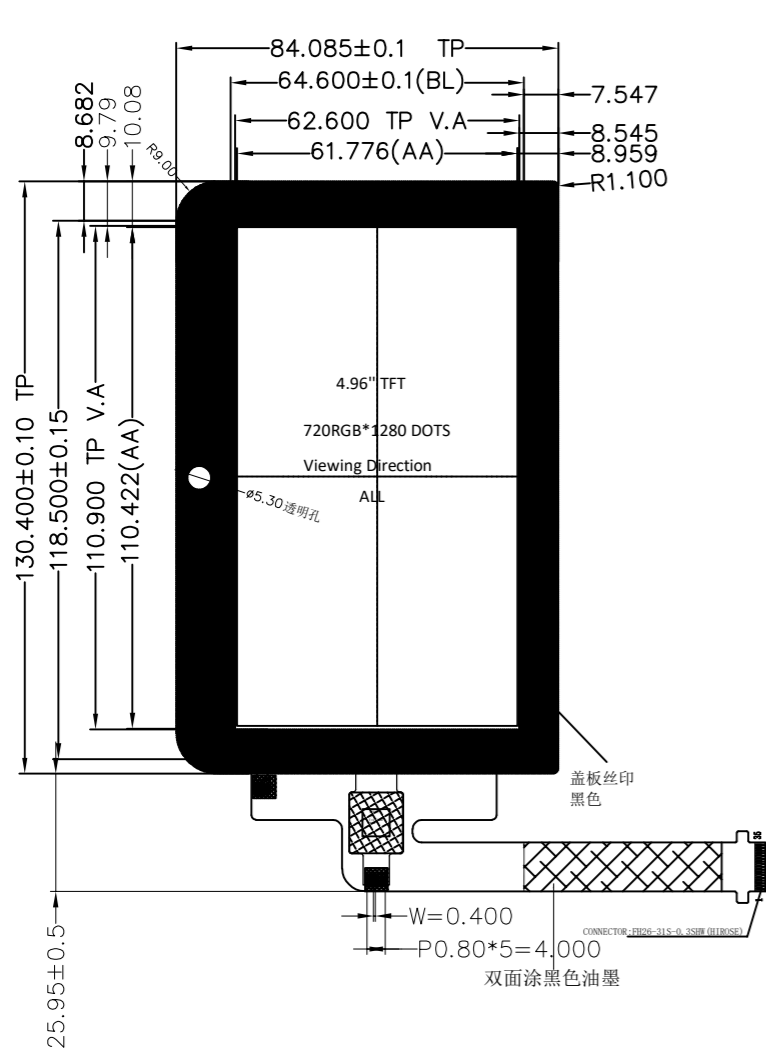


Revised Record

1.0 2021-10-28 New Issue

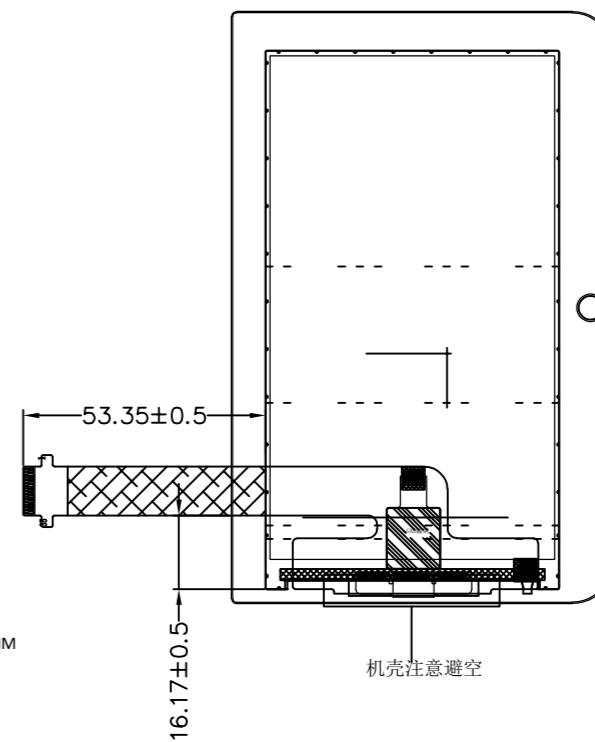

- 2.95<sup>+0.00</sup><sub>-0.15</sub> 总厚度
- 1.13<sup>+0.00</sup><sub>-0.10</sub> TP
- 0.700 GLASS
- 0.175 OCA
- 1.65±0.1(LCM)

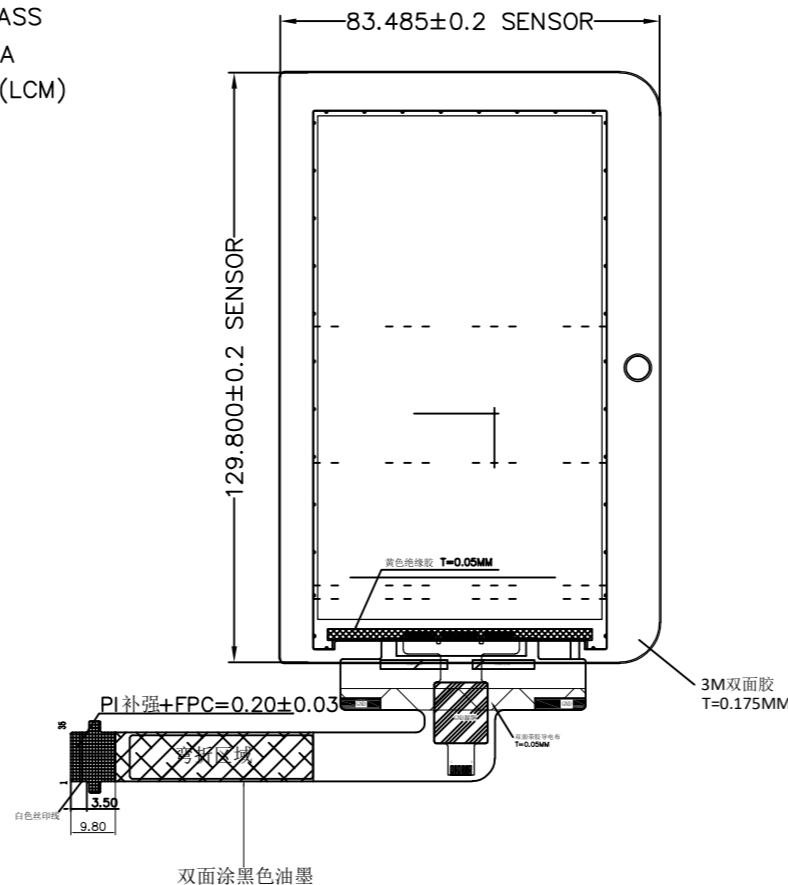


FPC弯折示意图  
弯折出货

1	VDD2.8V
2	SCL
3	SDA
4	EINT
5	ERST
6	GND

INTERFACE	
1	GND
2	NC
3	CTP_VDD
4	CTP_SCL
5	CTP_SDA
6	CTP_INT
7	CTP_RST
8	GND
9	NC
10	LEDA
11	NC
12	LEDK
13	NC
14	GND
15	IOVCC
16	VCI
17	GND
18	RESET
19	TE
20	GND
21	D3N
22	D3P
23	GND
24	CLP
25	CLN
26	GND
27	D1N
28	D1P
29	GND
30	D0N
31	D0P
32	GND
33	D2N
34	D2P
35	GND

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: 5.0" / IPS / 720x1280
- 2. DRIVE IC: ST7703
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. VIEWING ANGLE: ALL
- 6. BACKLIGHT: LED / 80mA
- 7. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

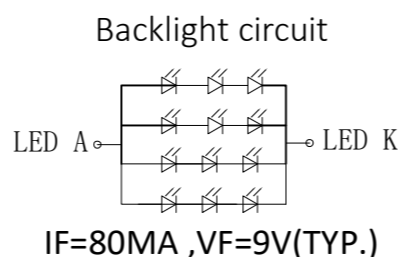


**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn

**BF5035-01CL**

VERSION: 1.0

CHECKED BY: William

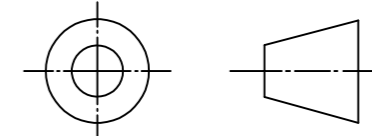

NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2021-10-28