


PIN	SYMBOL
1	VBL-
2	VBL+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

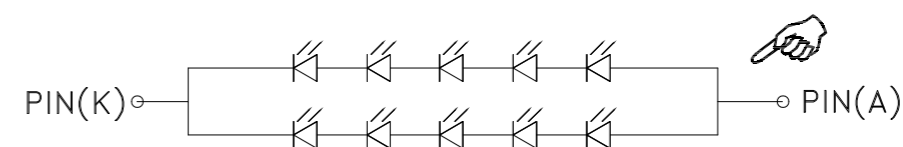

B/L CIRCUIT DIAGRAM

SPECIFICATIONS:

- | | |
|---------------------------|-------------------------------|
| 1. DISPLAY TYPE: | 4.3"/ TN / 480*272 |
| 2. DRIVE IC: | ST7282 |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C |
| 4. STORAGE TEMPERATURE: | -30 ~ 80°C |
| 5. VIEWING ANGLE: | 6 O' CLOCK |
| 6. BACKLIGHT: | 10 WHITE LED, 15.5±1.0V, 40mA |
| 7. BRIGHTNESS: | 500 CD/M2 |
| 8. TOLERANCE NOT STATED: | ±0.2 MM |
| 9. REMARK: | CUT EDGES DEBURRED |
| 10. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF4340-04L

VERSION: 1.0

CHECKED BY: William

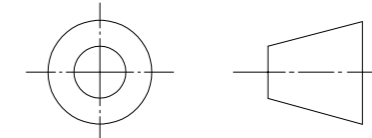



NO.: 1 OF 2

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2022-5-23

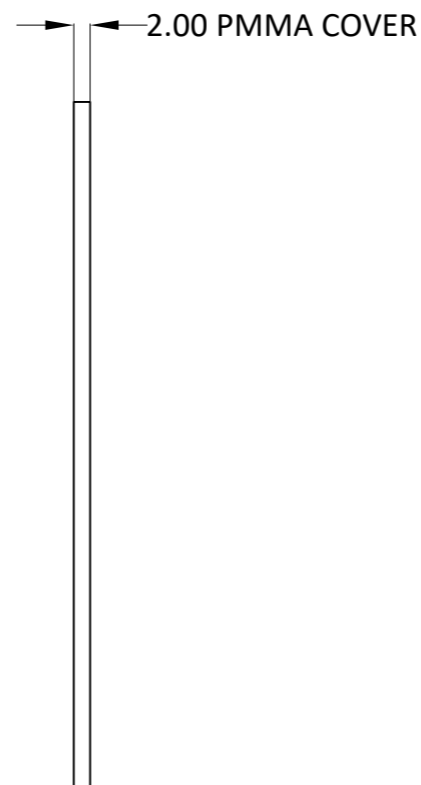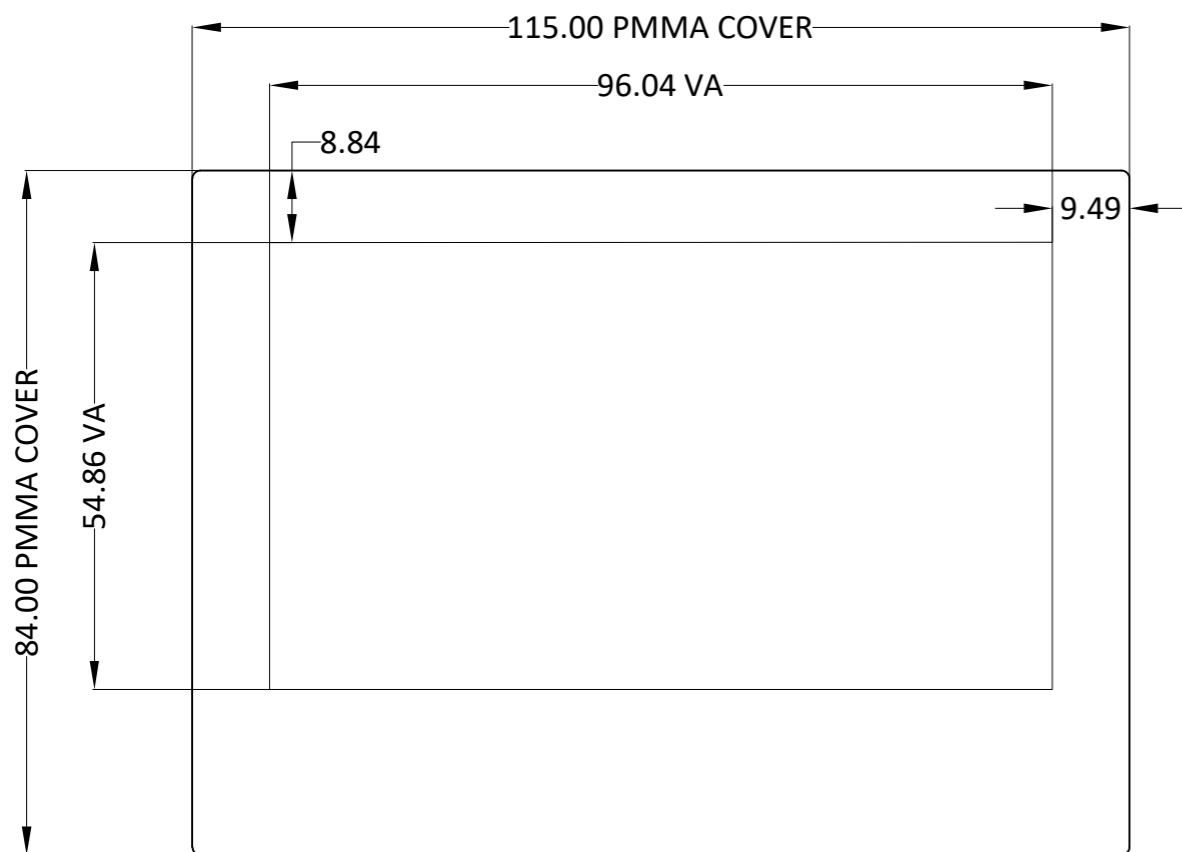

PMMA COVER


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF4340-04L

VERSION: 1.0

CHECKED BY: William

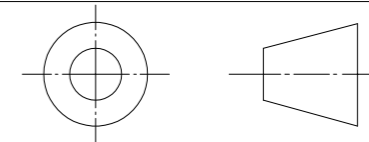

NO.: 2 OF 2

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2022-5-23