


PIN	SYMBOL
1	VSS
2	VCC(5V)
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VEE
19	LEDA
20	LEDK

SPECIFICATIONS:

- | | |
|---------------------------|-------------------------------------|
| 1. DISPLAY TYPE: | STN / NEGATIVE (BLUE) / TRANSMISIVE |
| 2. DRIVE IC: | RA8835 or EQV. |
| 3. OPERATING VOLTAGE: | VOP=25V, VDD = 5.0V |
| 4. OPERATING TEMPERATURE: | -20 ~ 70°C |
| 5. STORAGE TEMPERATURE: | -30 ~ 80°C |
| 6. DRIVE MODE: | 1/240 DUTY, 1/16 BIAS |
| 7. VIEWING ANGLE: | 6 O'CLOCK |
| 8. BACKLIGHT: | WHITE LED, I = 180mA |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |




BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BB320240-07

VERSION: 1.0

CHECKED BY: William

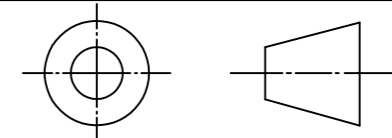

NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2013-10-8