


INTERFACE			
J3		J1	
1	LED1 K	1	GND
2	LED2 K	2	VDD
3	LED3 K	3	VO
4	LED4 K	4	WR
5	LED1-4 A	5	RD
		6	CS
		7	AO
		8	RES
		9	DB0
		10	DB1
		11	DB2
		12	DB3
		13	DB4
		14	DB5
		15	DB6
		16	DB7
		17	N.C
		18	VOUT
		19	BLA
		20	BLK

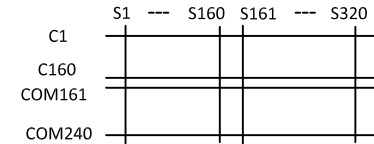

COM&SEG layout

**SPECIFICATIONS:**

- |                           |                                 |
|---------------------------|---------------------------------|
| 1. DISPLAY TYPE:          | FSTN / POSITIVE / TRANSFLECTIVE |
| 2. DRIVE IC:              | RA8835AP3N                      |
| 3. OPERATING VOLTAGE:     | VDD = 5.0V                      |
| 4. OPERATING TEMPERATURE: | -20°C ~ +80°C                   |
| 5. STORAGE TEMPERATURE:   | -20°C ~+ 80°C                   |
| 6. DRIVE MODE:            | 1/240 DUTY, 1/12 BIAS           |
| 7. VIEWING ANGLE:         | 6 O'CLOCK                       |
| 8. BACKLIGHT:             | Blue Color                      |
| 9. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT          |


**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn

**BG320240-01**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 3

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2016-3-26