





Revised Record

1.0 2017-2-9 New Issue

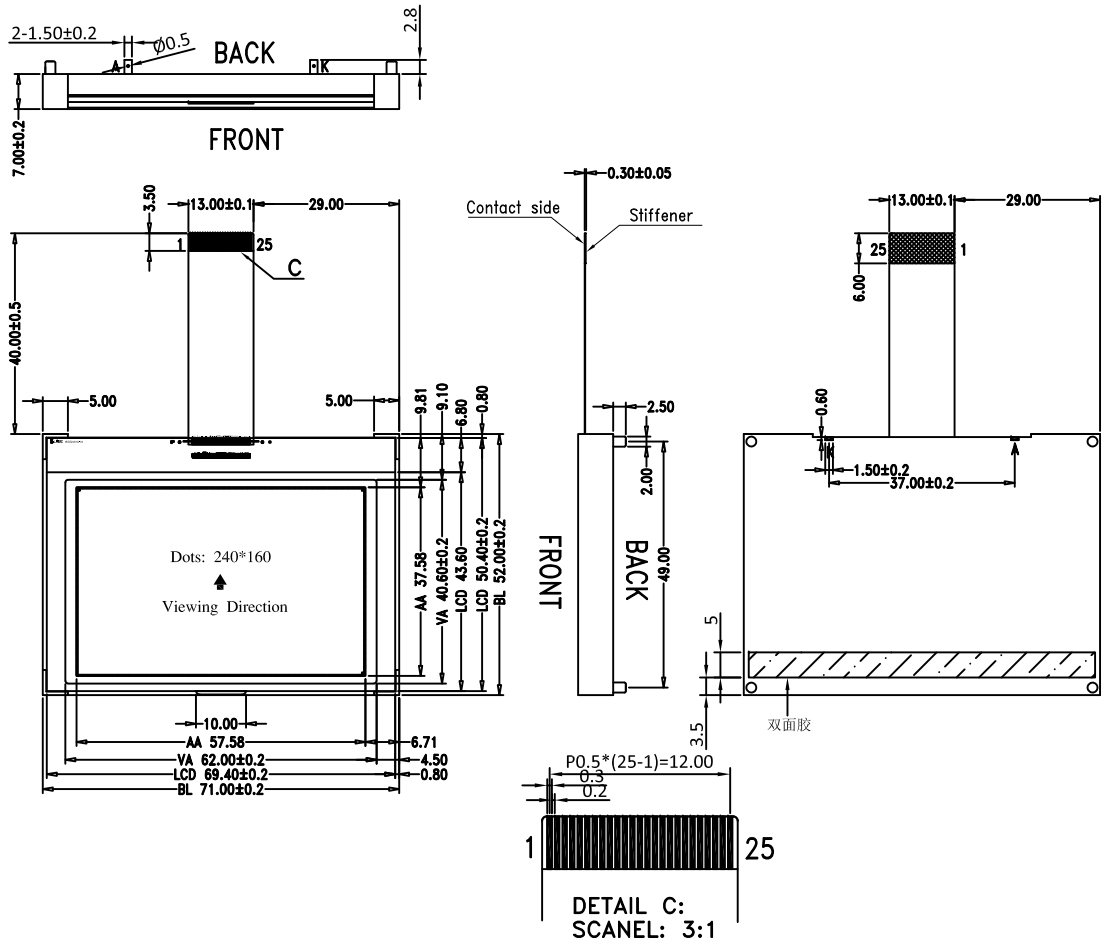

PIN	SYMBOL
1	ESD
2	AO
3	RWR
4	D0
5	D1
6	D2
7	D3
8	D4
9	D5
10	D6
11	D7
12	ERD
13	RSTB
14	IF1
15	IF2
16	IF3
17	CSB
18	VDD1
19	VD1
20	VSS
21	VDD
22	VM
23	V0
24	XV0
25	VG

SPECIFICATIONS:

- | | |
|---------------------------|----------------------------------|
| 1. DISPLAY TYPE: | FSTN / POSITIVE / TRANSFLECTIVE |
| 2. DRIVE IC: | ST7586S |
| 3. OPERATING VOLTAGE: | Vop = 16.0V, Vdd=3.3V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C |
| 5. STORAGE TEMPERATURE: | -30°C ~+ 80°C |
| 6. DRIVE MODE: | 1/160 DUTY, 1/12 BIAS |
| 7. VIEWING ANGLE: | 6 O'CLOCK |
| 8. BACKLIGHT: | 5PCS WHITE LED If<85mA & Vf=3.3V |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Shawn	BG240160-05	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2016-2-9