


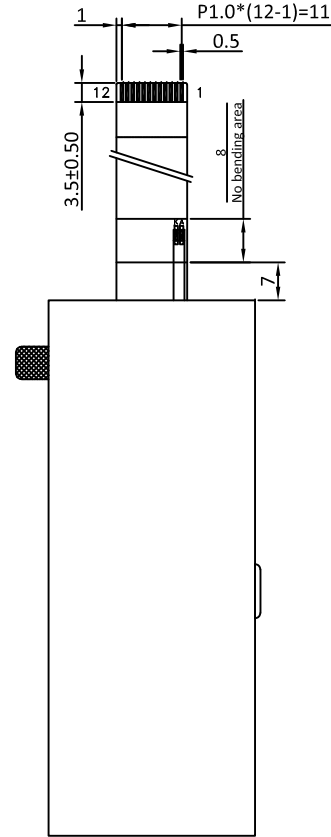
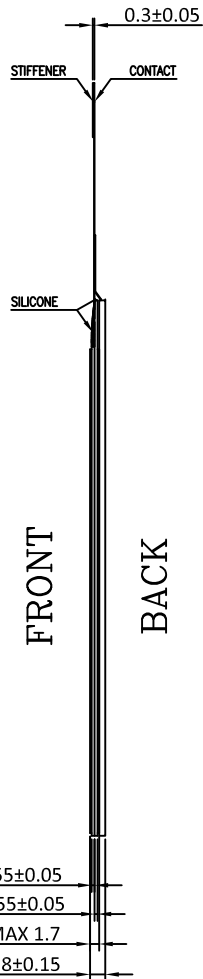


Revised Record

1.0 2016-10-31 New Issue

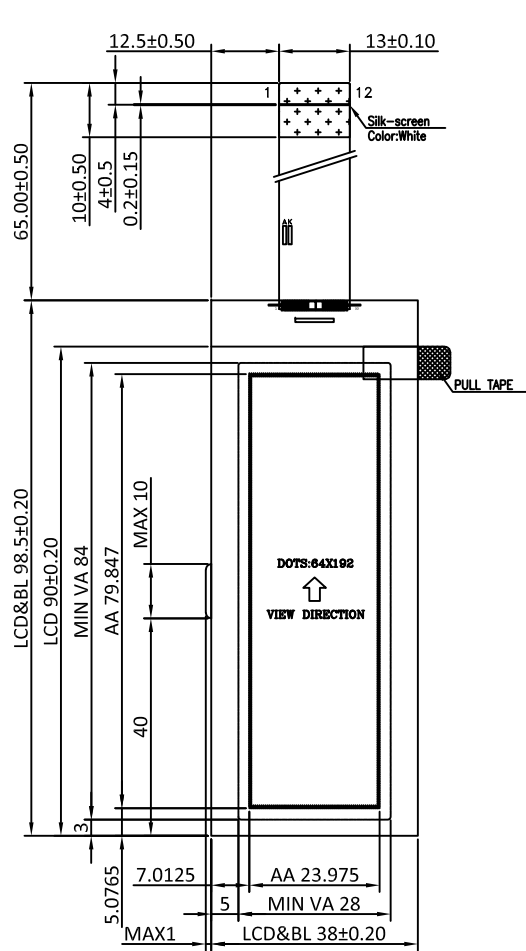

PIN	SYMBOL
1	A
2	CS0
3	RST
4	A0
5	SCL
6	SDA
7	VDD
8	VSS
9	V0
10	XVO
11	VG
12	K

SPECIFICATIONS:

- | | |
|---------------------------|---------------------------------|
| 1. DISPLAY TYPE: | FSTN / POSITIVE / TRANSFLECTIVE |
| 2. DRIVE IC: | ST7539 |
| 3. OPERATING VOLTAGE: | Vop=10V; Vdd=3.3V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C |
| 5. STORAGE TEMPERATURE: | -30°C ~+80°C |
| 6. DRIVE MODE: | 1/65DUTY, 1/9BIAS |
| 7. VIEWING ANGLE: | 6 O'CLOCK |
| 8. BACKLIGHT: | 2PCS White LED,VF=3.4V; IF=30mA |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BG64192-01

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 3

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2016-10-31