

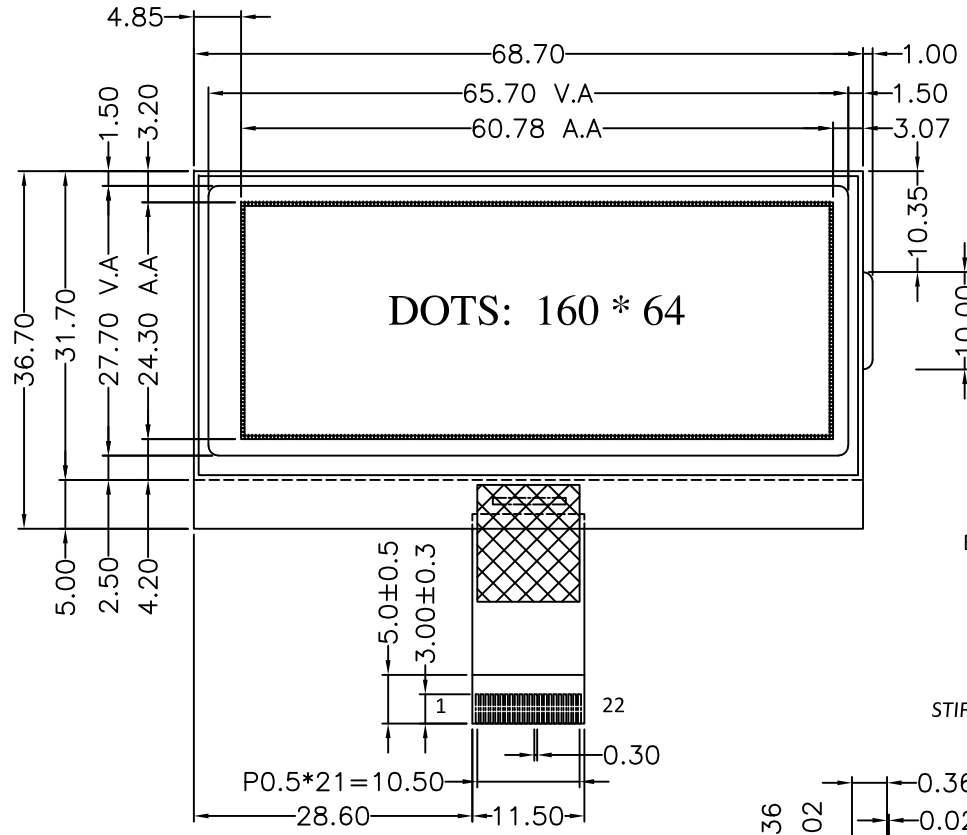



Revised Record

1.0 2017-08-12 New Issue



注意：显示区不是居中的！

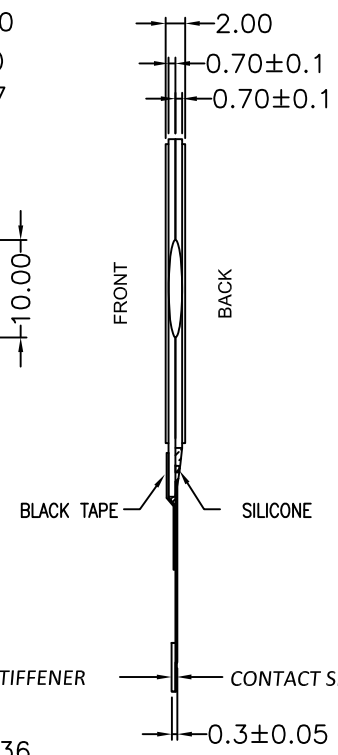

PIN	SYMBOL
1	D7
2	D6
3	D5
4	D4
5	D3
6	D2
7	D1
8	D0
9	RST
10	WR0
11	WR1
12	CD
13	CS0
14	BM0
15	BM1
16	VSS
17	VDD
18	VB0+
19	VB1+
20	VB1-
21	VB0-
22	VLCD

SPECIFICATIONS:

- 1. DISPLAY TYPE: FSTN / B-W / POSITIVE/ REFLECTIVE
- 2. DRIVE IC: UC1609C
- 3. OPERATING VOLTAGE: Vlcd=11V; Vdd=3.3V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -30°C ~+80°C
- 6. DRIVE MODE: 1/64DUTY, 1/9BIAS
- 7. VIEWING ANGLE: 12 O'CLOCK
- 8. BACKLIGHT: NONE
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BG16064-01	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2017-08-12