



注意：
 VDD与VBAT在FPC上已连接在一起(VDD=VBAT=3.0~3.3V)，
 因此VCC只允许外接一个电容，不可使用外部电源输入到VCC。

| 4-wire SPI | |
|------------|----------|
| PIN | SYMBOL |
| 1 | C2N |
| 2 | C2P |
| 3 | C1P |
| 4 | C1N |
| 5 | VSS |
| 6 | VDD/VBAT |
| 7 | CS# |
| 8 | RES# |
| 9 | D/C |
| 10 | SCLK |
| 11 | SDIN |
| 12 | IREF |
| 13 | VCOMH |
| 14 | VCC |

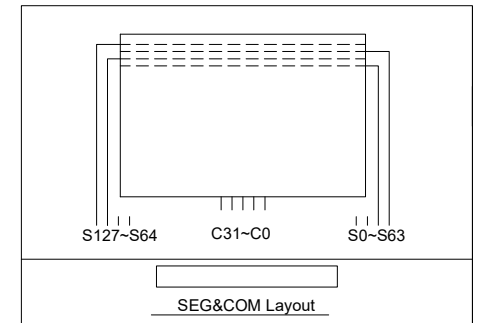

SPECIFICATIONS:

- | | |
|-----------------------|------------------------|
| 1. DISPLAY TYPE: | OLED |
| 2. DISPLAY SIZE: | 0.87" |
| 3. COLOR: | WHITE |
| 4. DOT MATRIX: | 128x32 |
| 5. DRIVE IC: | SH1316Z |
| 6. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

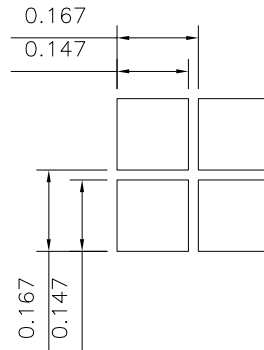

BOCEN DISPLAY TECHNOLOGY CO., LTD.

| | | |
|--|-------------------|-----------------|
| DESIGNED BY: Shawn | BO12832-29 | VERSION: 1.0 |
| CHECKED BY: William | | NO.: 1 OF 1 |
| APPROVED BY: Rio | | UNIT: mm |
| Company Website: http://www.bocentech.com | | DATE: 2019-5-17 |