
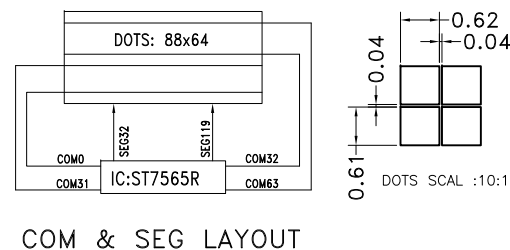


Revised Record

1.0 2016-10-20 New Issue

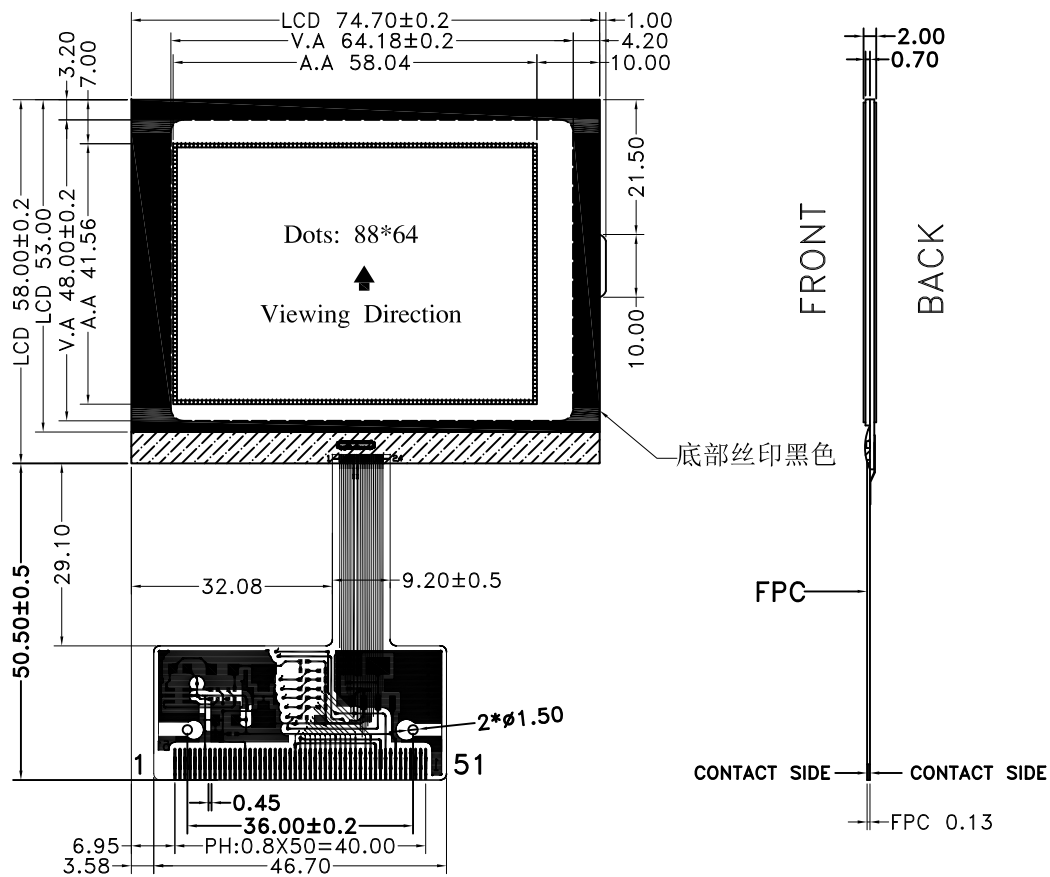

PIN	SYMBOL	PIN	SYMBOL
1	NC	27	DB5
2	NC	28	DB4
3	NC	29	DB3
4	NC	30	DB2
5	NC	31	DB1
6	NC	32	DB0
7	VDD	33	VSS
8	NC	34	RD
9	NC	35	WR
10	NC	36	AO
11	NC	37	C86
12	NC	38	N.C
13	NC	39	CS
14	NC	40	PSB
15	VSS	41	DB7
16	NC	42	DB6
17	NC	43	RST
18	NC	44	NC
19	NC	45	VDD(5V)
20	NC	46	NC
21	NC	47	NC
22	NC	48	NC
23	NC	49	NC
24	NC	50	NC
25	DB7	51	NC
26	DB6		

SPECIFICATIONS:

- | | |
|---------------------------|--------------------------------------|
| 1. DISPLAY TYPE: | STN / BLUE / NEGATIVE / TRANSMISSIVE |
| 2. DRIVE IC: | ST7565R |
| 3. OPERATING VOLTAGE: | Vop=8.6V; Vdd=5.0V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C |
| 5. STORAGE TEMPERATURE: | -30°C ~+80°C |
| 6. DRIVE MODE: | 1/64DUTY, 1/9BIAS |
| 7. BACKLIGHT: | ----- |
| 8. VIEWING ANGLE: | 6 O'CLOCK |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BG8864-02	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2016-10-20