


PIN	SYMBOL
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VSD
11	HSD
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	SHLR
40	UPDN
41	VDDG
42	VEEG
43	AVDD
44	RSTB
45	NC
46	VCOM
47	DITH
48	GND
49	NC
50	NC

### SPECIFICATIONS:

- |                           |                           |
|---------------------------|---------------------------|
| 1. DISPLAY TYPE:          | 7.0"/ IPS / 1204*600      |
| 2. DRIVE IC:              | JD79001DCGB + JD73215BCGA |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C                |
| 4. STORAGE TEMPERATURE:   | -30 ~ 80°C                |
| 5. VIEWING ANGLE:         | IPS                       |
| 6. BACKLIGHT:             | 42 WHITE LED, 300mA       |
| 7. BRIGHTNESS:            | 1000 CD/M2 (TYP)          |
| 8. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT    |

Backlight Circuit Diagram

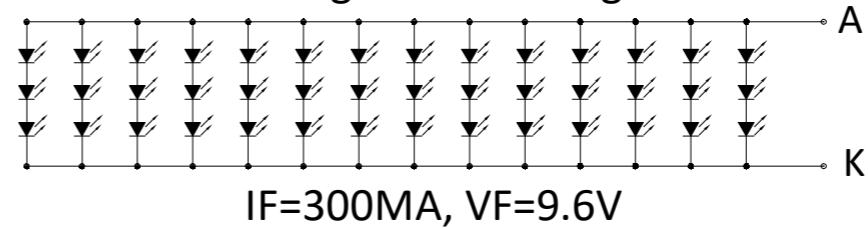


## BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

**BF7050-04**

VERSION: 1.0 NO.:

CHECKED BY: William

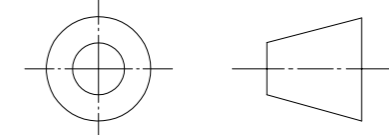

1 OF 1 UNIT:

APPROVED BY: Rio

mm DATE:

Website: <http://www.bocentech.com>

2022-6-15