
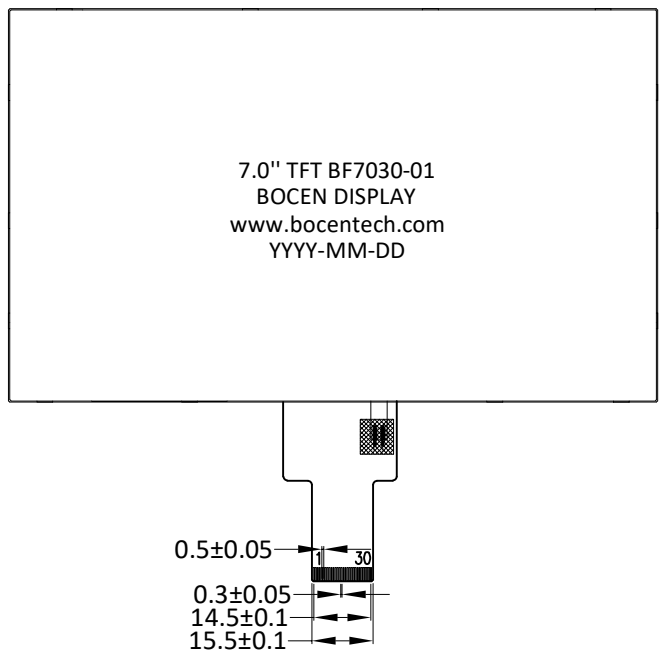
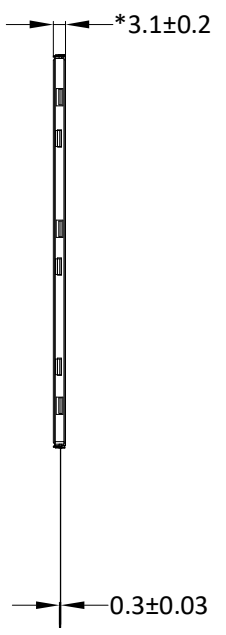


<b>Version</b>	1.0	2022-8-10	New Issue				
----------------	-----	-----------	-----------	--	--	--	--

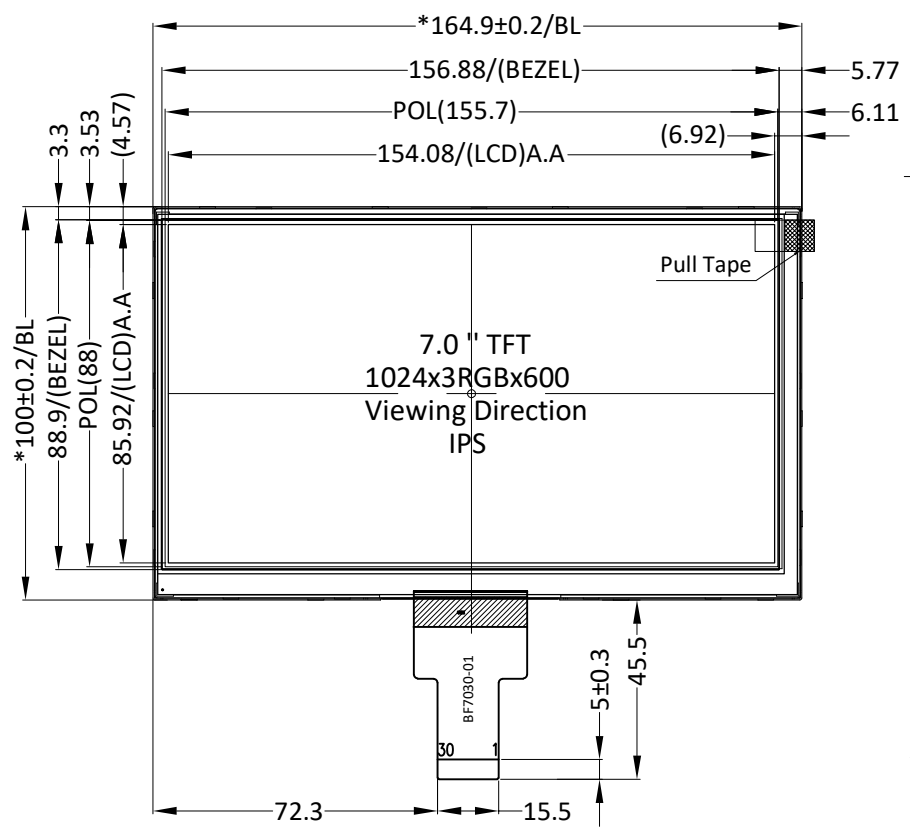


PIN	SYMBOL
1	LEDA
2	LEDA
3	LCD-VGH
4	LCD-VGL
5	UPDN
6	SHLR
7	LEDK
8	LEDK
9	AVDD
10	GND
11	MIPI-TDP3
12	MIPI-TDN3
13	GND
14	MIPI-TDP2
15	MIPI-TDN2
16	GND
17	MIPI-TDP
18	MIPI-TDN
19	GND
20	MIPI-TDP1
21	MIPI-TDN1
22	GND
23	MIPI-TDP0
24	MIPI-TDN0
25	GND
26	STBYB
27	RESET
28	VDD
29	VDD
30	VCOM

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: 7.0"/ 1024\*600
- 2. DRIVE IC: EK79007AD+EK73217
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. VIEWING ANGLE: IPS
- 6. BACKLIGHT: 21 WHITE LED, 140mA
- 7. BRIGHTNESS: 300 CD/M<sup>2</sup>
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

**Backlight Circuit Diagram**

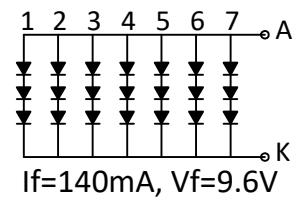

<b>BOCEN DISPLAY TECHNOLOGY CO., LTD.</b>		
DESIGNED BY: Shawn	<b>BF7030-01</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2022-8-10