
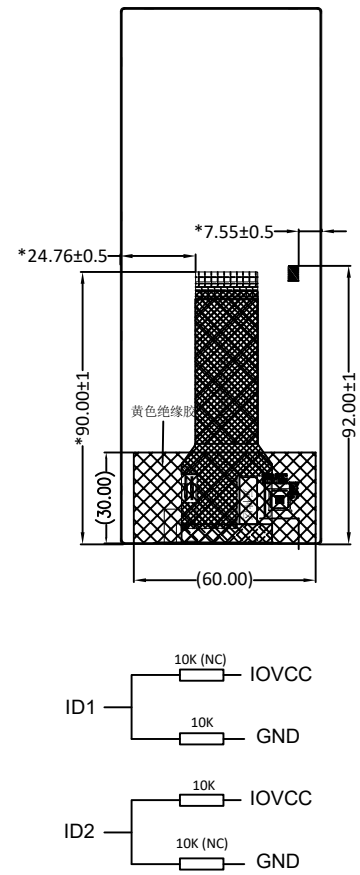
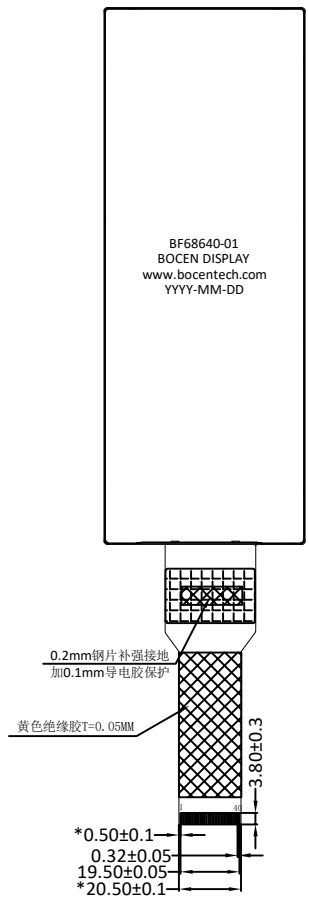
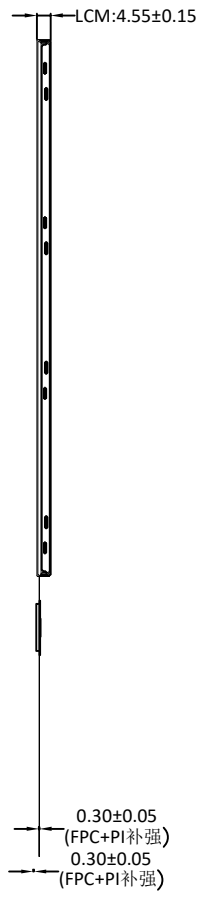


Version	1.0	2022-9-6	New Issue				
----------------	-----	----------	-----------	--	--	--	--

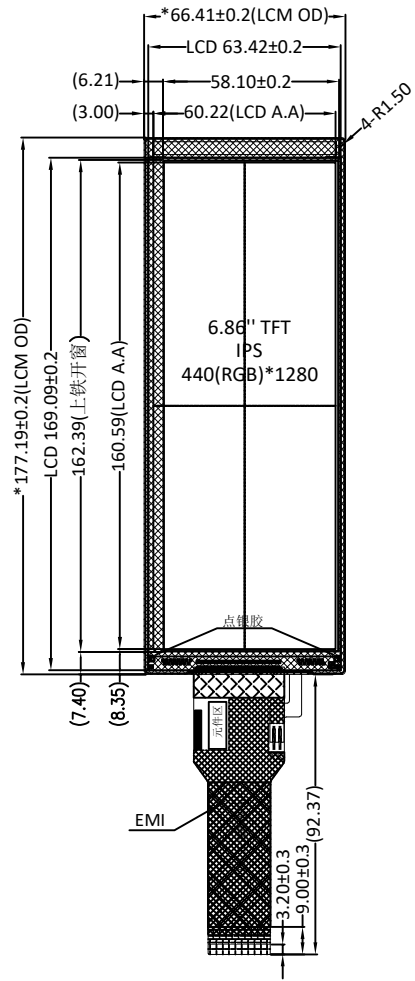


PIN	SYMBOL
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	IOVCC(3.3V)
19	IOVCC(3.3V)
20	NC
21	ID1
22	ID2
23	NC
24	RSTB
25	GND
26	NC
27	GND
28	K
29	K
30	GND
31	NC
32	GND
33	GND
34	NC
35	A
36	A
37	GND
38	VDD-3V3
39	VDD-3V3
40	NC



SPECIFICATIONS:

- 1. DISPLAY TYPE: 6.86" / IPS / 440*1280
- 2. DRIVE IC: HX8394-F310PD170
- 3. OPERATING TEMPERATURE: -10 ~ 60°C
- 4. STORAGE TEMPERATURE: -20 ~ 70°C
- 5. VIEWING ANGLE: IPS
- 6. BACKLIGHT: 15 WHITE LED, 120MA
- 7. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

Backlight circuit

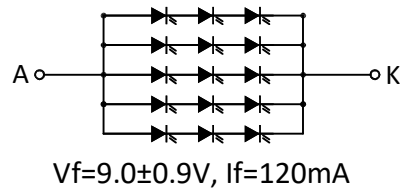

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BF68640-01	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2022-9-6