
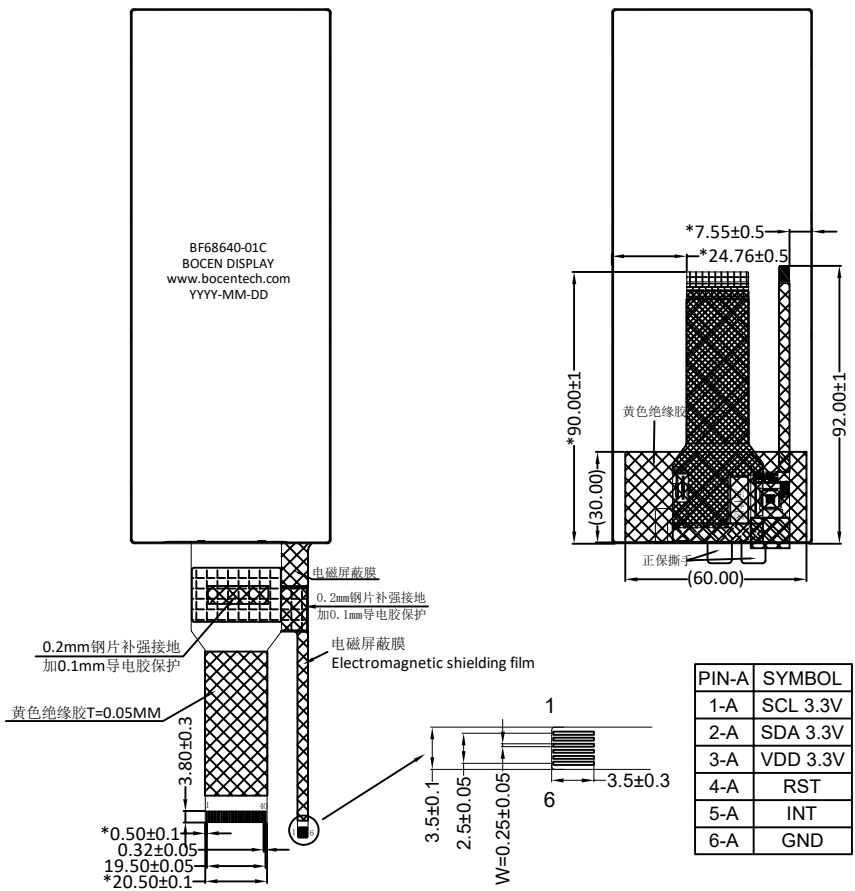
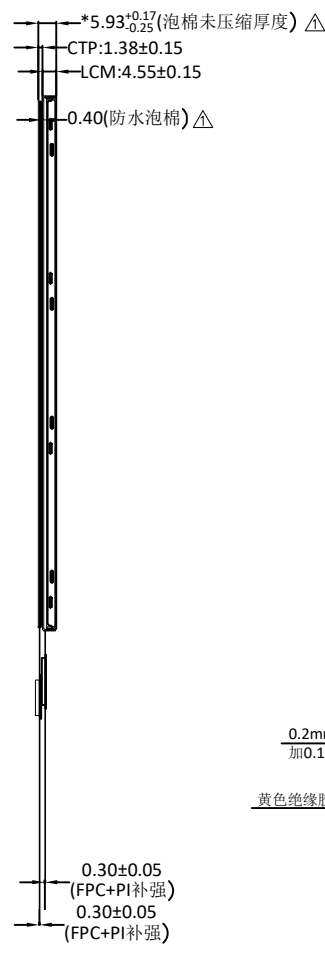


Version	1.0	2022-9-6	New Issue				
---------	-----	----------	-----------	--	--	--	--

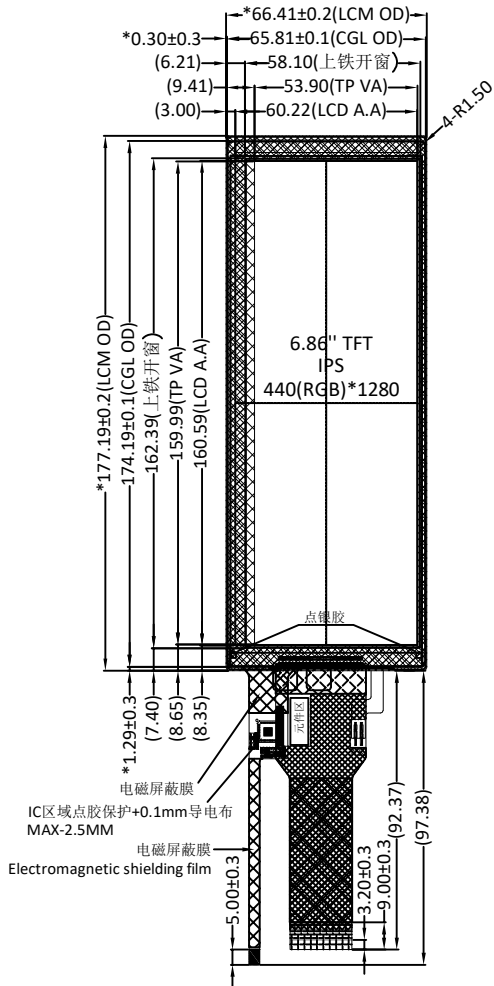


PIN	SYMBOL
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	IOVCC
19	IOVCC
20	NC
21	SDA-NC
22	SCL-NC
23	NC
24	RSTB
25	GND
26	NC
27	GND
28	K
29	K
30	GND
31	NC
32	GND
33	GND
34	NC
35	A
36	A
37	GND
38	VDD-3V3
39	VDD-3V3
40	NC

PIN-A	SYMBOL
1-A	SCL 3.3V
2-A	SDA 3.3V
3-A	VDD 3.3V
4-A	RST
5-A	INT
6-A	GND



**SPECIFICATIONS:**

- 1. DISPLAY TYPE: 6.86" / IPS / 440\*1280
- 2. DRIVE IC: HX8394-F310PD170
- 3. CTP IC: GT911
- 4. OPERATING TEMPERATURE: -10 ~ 60°C
- 5. STORAGE TEMPERATURE: -20 ~ 70°C
- 6. VIEWING ANGLE: IPS
- 7. VCC / IOVCC: 3.3V / 3.3V Δ
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

**Backlight circuit**

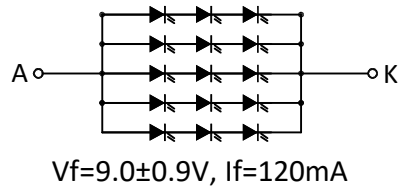

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BF68640-01C</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2022-9-6