
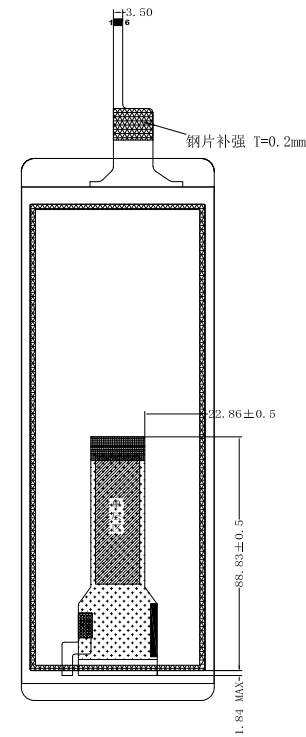
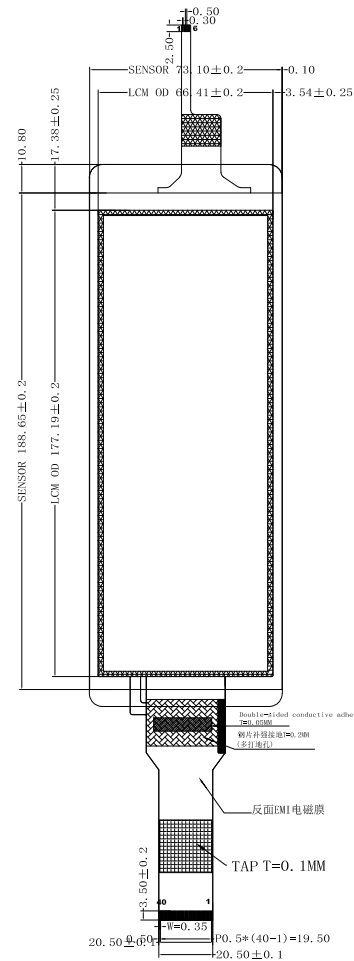
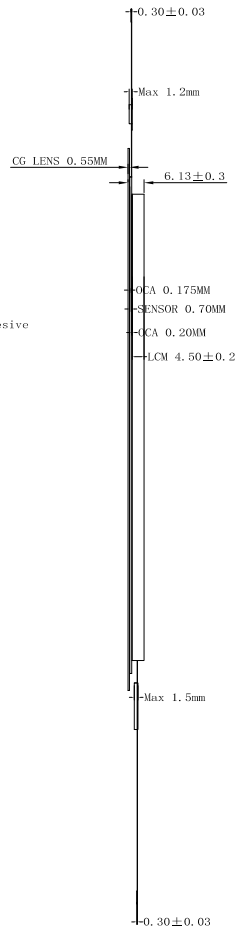


Version

1.0 2022-8-12 New Issue

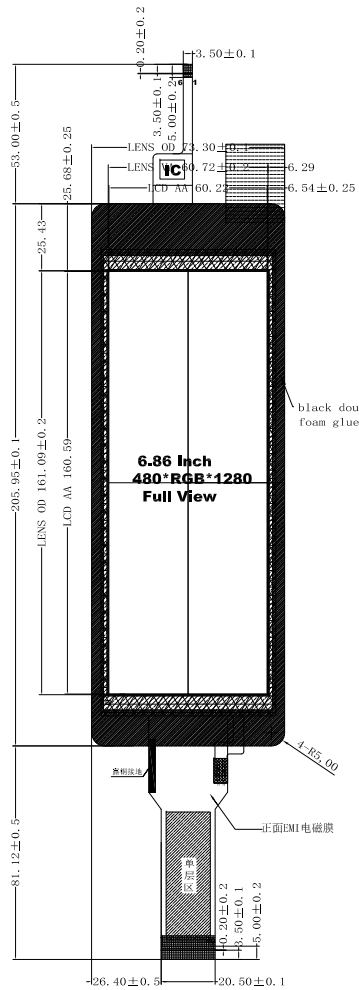


IIC	
1	GND
2	RST
3	INT
4	SDA 3.3V
5	SCL 3.3V
6	VDD

PIN	SYMBOL
1	GND
2	DOP
3	DON
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P-NC
15	D3N-NC
16	GND
17	GND
18	IOWCC
19	IOWCC
20	NC
21	SDA-NC
22	SCL-NC
23	NC
24	RSTB
25	STBYB
26	NC
27	GND
28	K
29	K
30	GND
31	NC
32	GND
33	GND
34	NC
35	A
36	A
37	GND
38	VDD-3V3
39	VDD-3V3
40	NC

SPECIFICATIONS:

- 1. DISPLAY TYPE: 6.86"/ 480*1280
- 2. TFT DRIVER IC: ICN19706
- 3. TP DRIVER IC: GSL3670
- 4. OPERATING TEMPERATURE: -20 ~ +70°C
- 5. STORAGE TEMPERATURE: -30 ~ +80°C
- 6. VIEWING ANGLE: IPS
- 7. BACKLIGHT: 12 WHITE LED
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

Circuit Diagram: 3X4=12



BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BF68640-02C-L	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2022-8-12