

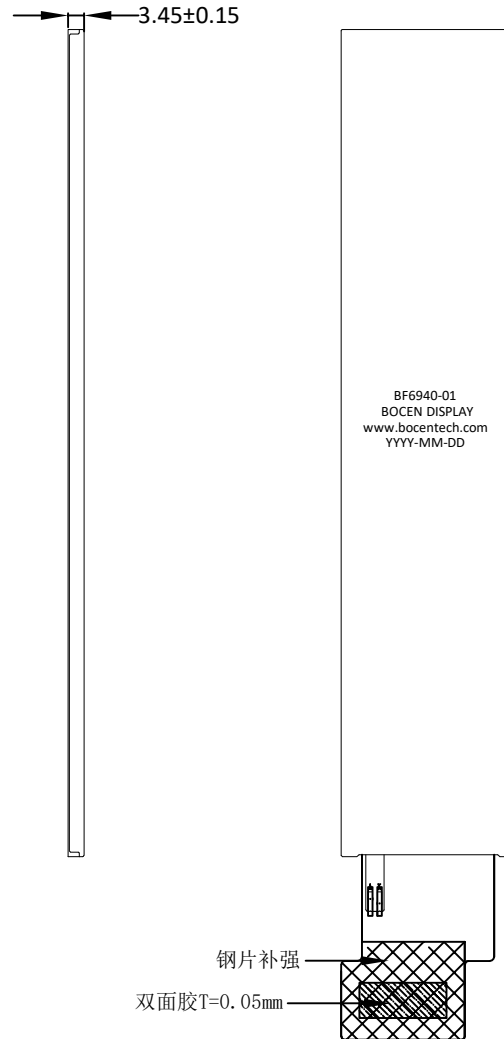


Version


1.0 2022-9-14 New Issue

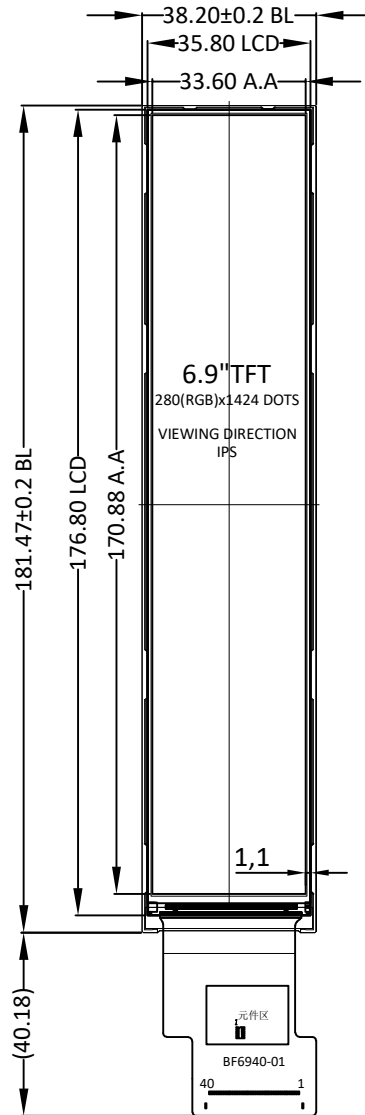

Backlight Circuit Diagram

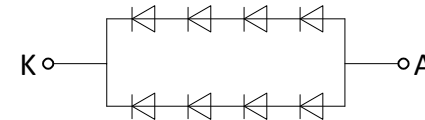

Recommend Flex Cable Structure



PIN	SYMBOL
1	GND
2	NC
3	LED+
4	LED+
5	NC
6	LED-
7	LED-
8	NC
9	GND
10	NC
11	AVDD(NC)
12	NC
13	VGH(NC)
14	NC
15	VGL(NC)
16	NC
17	GND
18	VCOM(NC)
19	GND
20	GND
21	RESET
22	VDD
23	STBYB
24	TP_SYNC(NC)
25	GND
26	D0P
27	D0N
28	GND
29	D1P
30	D1N
31	GND
32	CLKP
33	CLKN
34	GND
35	D2P
36	D2N
37	GND
38	D3P
39	D3N
40	GND

**SPECIFICATIONS:**

- |                           |                        |
|---------------------------|------------------------|
| 1. DISPLAY TYPE:          | 6.9" / 280*1424        |
| 2. DRIVE IC:              | JD9365DA-H3            |
| 3. OPERATING TEMPERATURE: | -20 ~ 70°C             |
| 4. STORAGE TEMPERATURE:   | -30 ~ 80°C             |
| 5. VIEWING ANGLE:         | IPS                    |
| 6. BACKLIGHT:             | 8 WHITE LED            |
| 7. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT |


**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn

**BF6940-01**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2022-9-14