



外壳模具
请预留FPC避空位

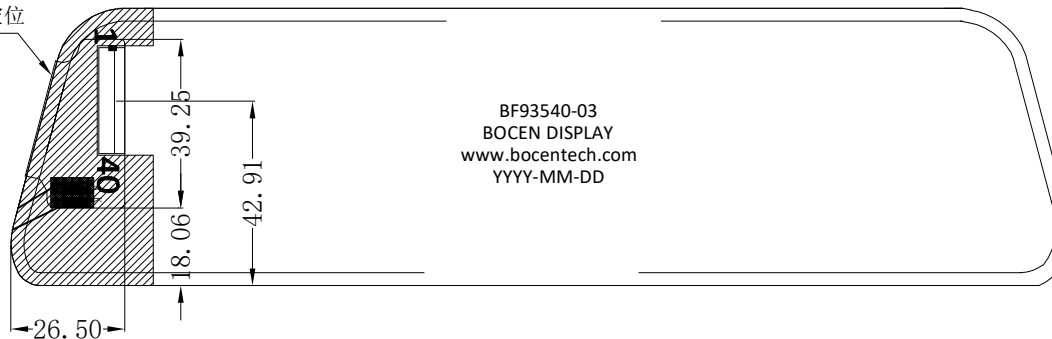

Backlight Circuit Diagram



7*2=14LED, 40*2=80mA

PIN	SYMBOL
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	NC
19	NC
20	NC
21	SDA-NC
22	SCL-NC
23	NC
24	RSTB
25	STBYB
26	NC
27	GND
28	K
29	K
30	GND
31	NC
32	GND
33	GND
34	NC
35	A
36	A
37	GND
38	VDD3.3V
39	VDD3.3V
40	NC

SPECIFICATIONS:

- | | |
|---------------------------|---|
| 1. DISPLAY TYPE: | 9.35" / IPS / 320*1280 |
| 2. DRIVE IC: | AV096XHQ-N10 |
| 3. OPERATING TEMPERATURE: | -10 ~ 60°C |
| 4. STORAGE TEMPERATURE: | -20 ~ 70°C |
| 5. VIEWING ANGLE: | IPS |
| 6. BACKLIGHT: | 14 WHITE LED, If = 40*2mA, Vf = 19.6 ± 1.8V |
| 7. TOLERANCE: | ±0.2 MM |
| 8. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BF93540-03

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2021-10-20