
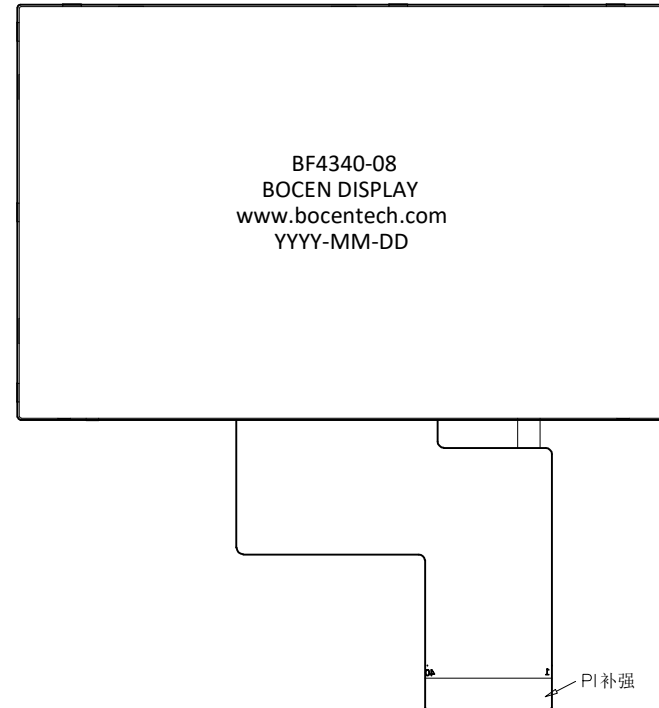


Version	1.0	2023-3-17	New Issue				
----------------	-----	-----------	-----------	--	--	--	--

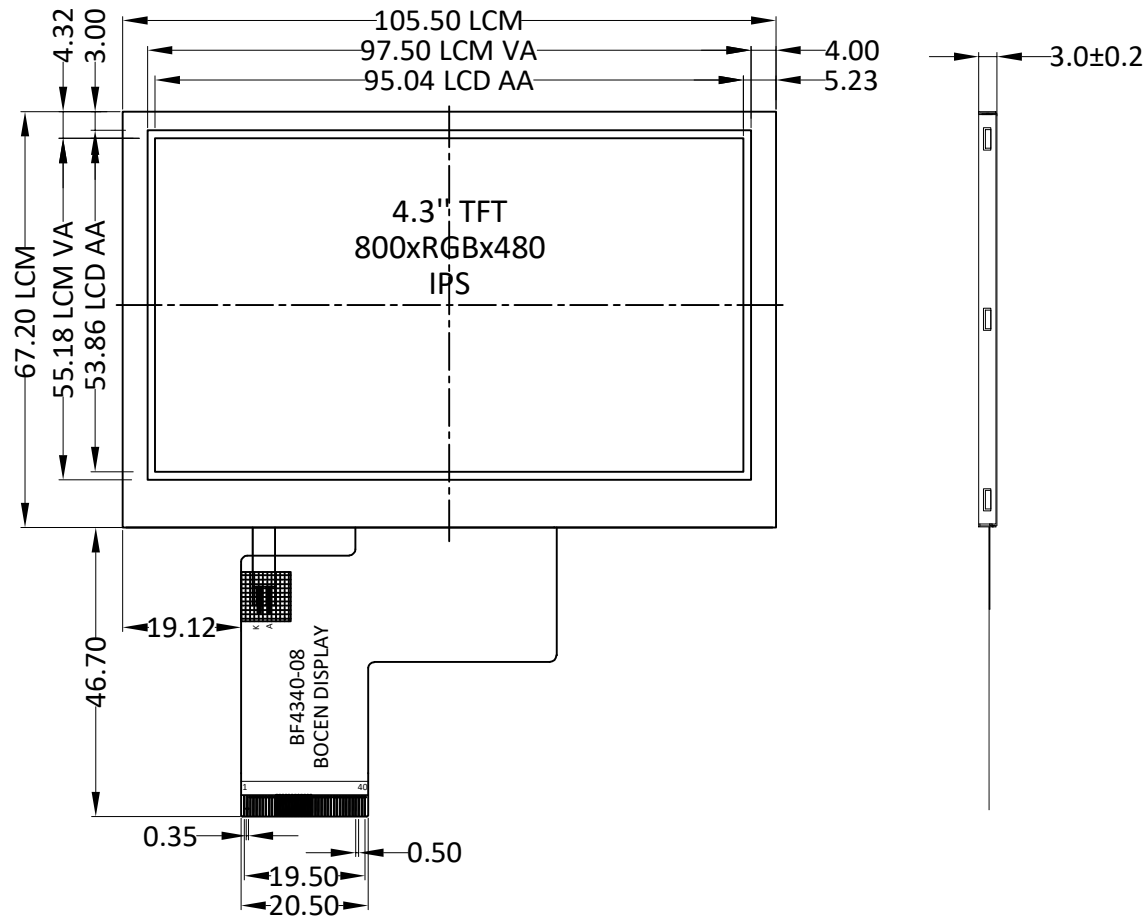


PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

SPECIFICATIONS:

- 1. DISPLAY TYPE: 4.3" TFT / IPS / 800*480
- 2. DRIVE IC: ST7262
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. BACKLIGHT: 7 WHITE LED
- 6. OPERATING VOLTAGE: 3.3V
- 7. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

LED CIRCUIT DIAGRAM




BOCEN DISPLAY TECHNOLOGY CO., LTD.


DESIGNED BY: David	BF4340-08	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2023-3-17

Version	1.0	2023-3-17	New Issue				


Front View

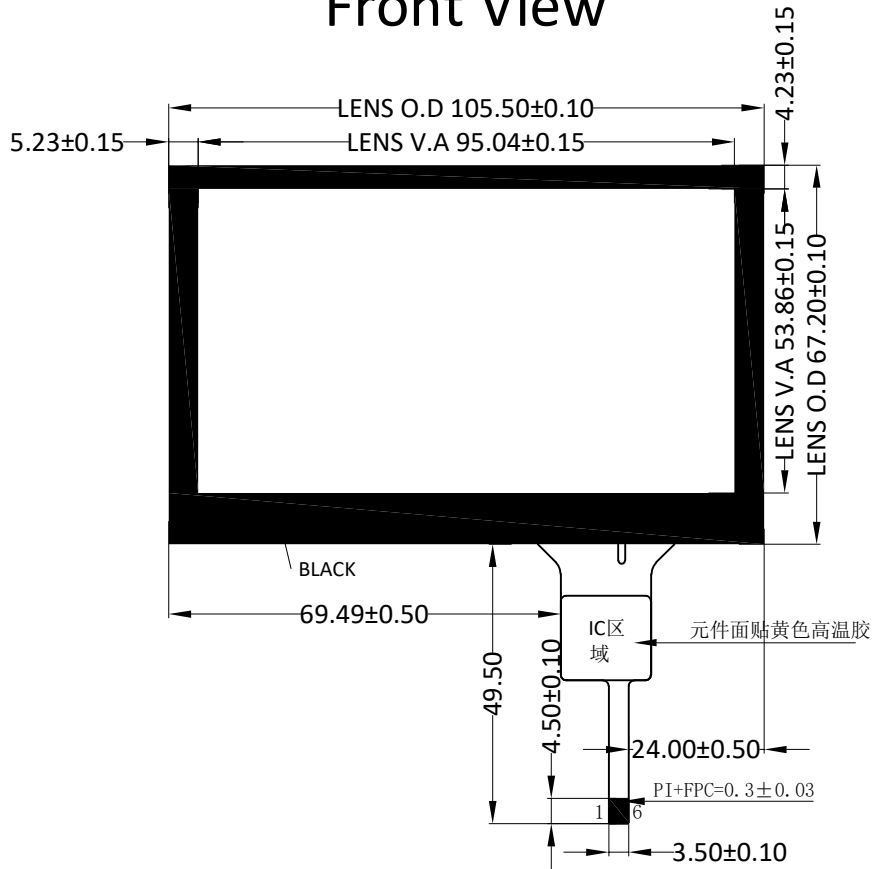

Side View

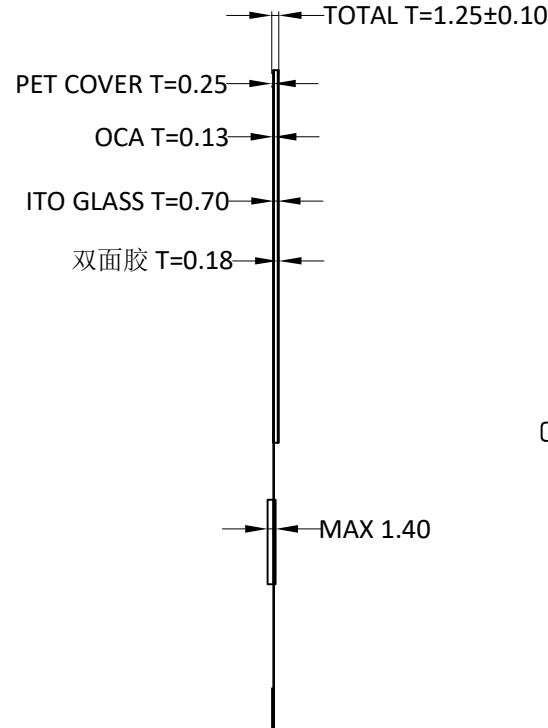



Rear View

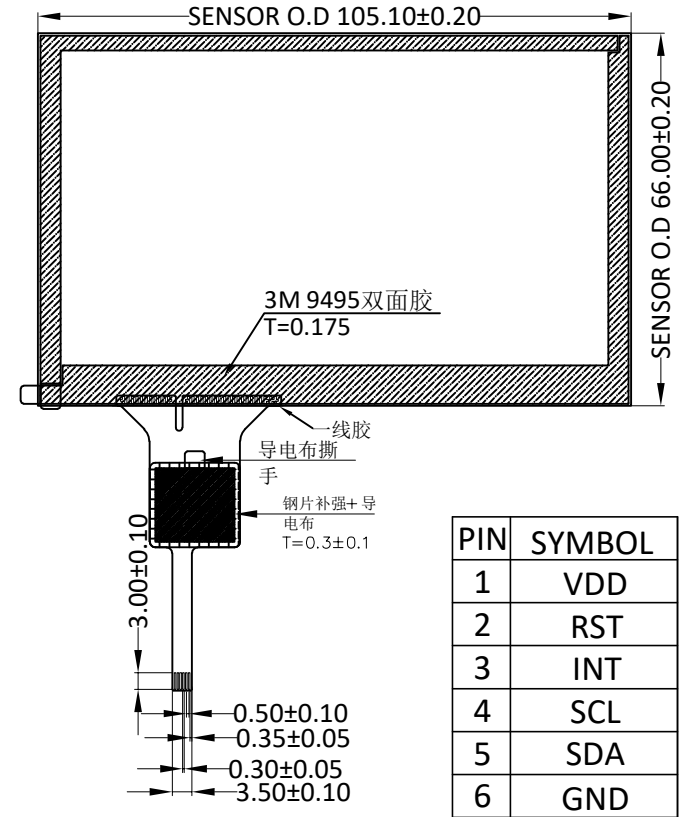

SPECIFICATIONS:

- | | |
|---------------------------|------------------------|
| 1. STRUCTURE: | P+G |
| 2. DRIVE IC: | GT911 |
| 3. OPERATING TEMPERATURE: | -10 ~ 60°C |
| 4. STORAGE TEMPERATURE: | -20 ~ 70°C |
| 5. INTERFACE: | I ² C COF |
| 6. OPERATING VOLTAGE: | 3.3V |
| 7. UNSPECIFIED TOLERANCE: | ±0.2 |
| 8. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: David	BF4340-08-CTP	VERSION: 1.0
CHECKED BY: William	 	NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2023-3-17