

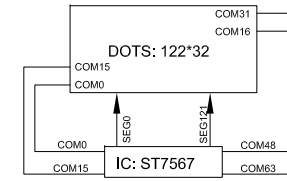
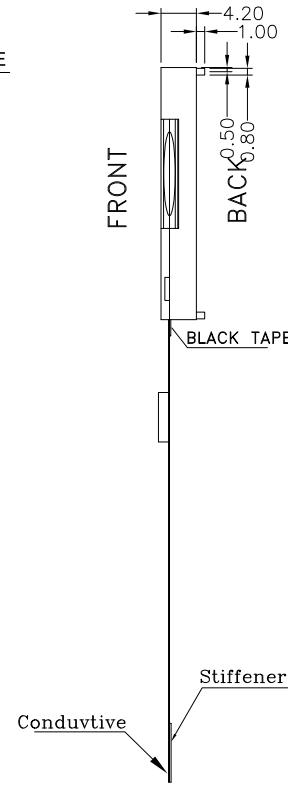


Revised Record

1.0 2016-10-26 New Issue

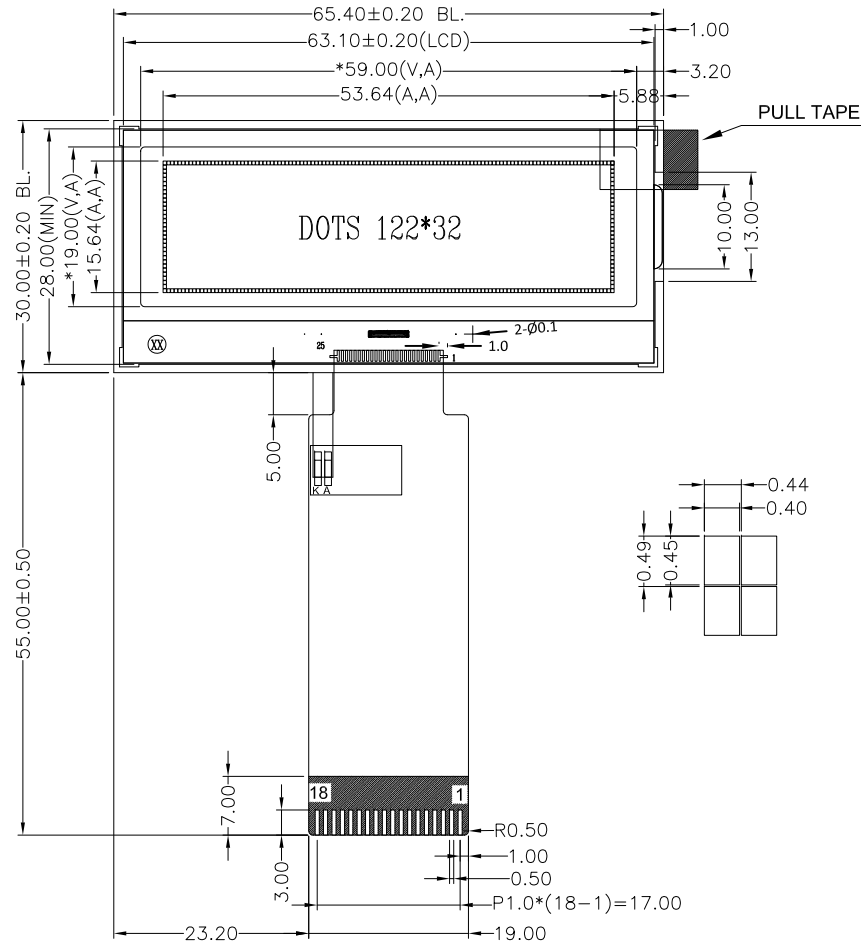

LCD LAYOUT





PIN	SYMBOL
1	VDD
2	VSS
3	NC
4	REST
5	CS
6	R/D
7	W/R
8	A0
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	LEDK

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: FSTN / POSITIVE / TRANSMISSIVE
- 2. DRIVE IC: ST7567
- 3. OPERATING VOLTAGE: Vop=6.5V; Vdd=3.3V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -30°C ~+80°C
- 6. DRIVE MODE: 1/33DUTY, 1/6BIAS
- 7. BACKLIGHT: 4PCS WHITE LED, IF=60mA; VF=3.0V
- 8. VIEWING ANGLE: 6 O'CLOCK
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BG12232-04</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2016-10-26