

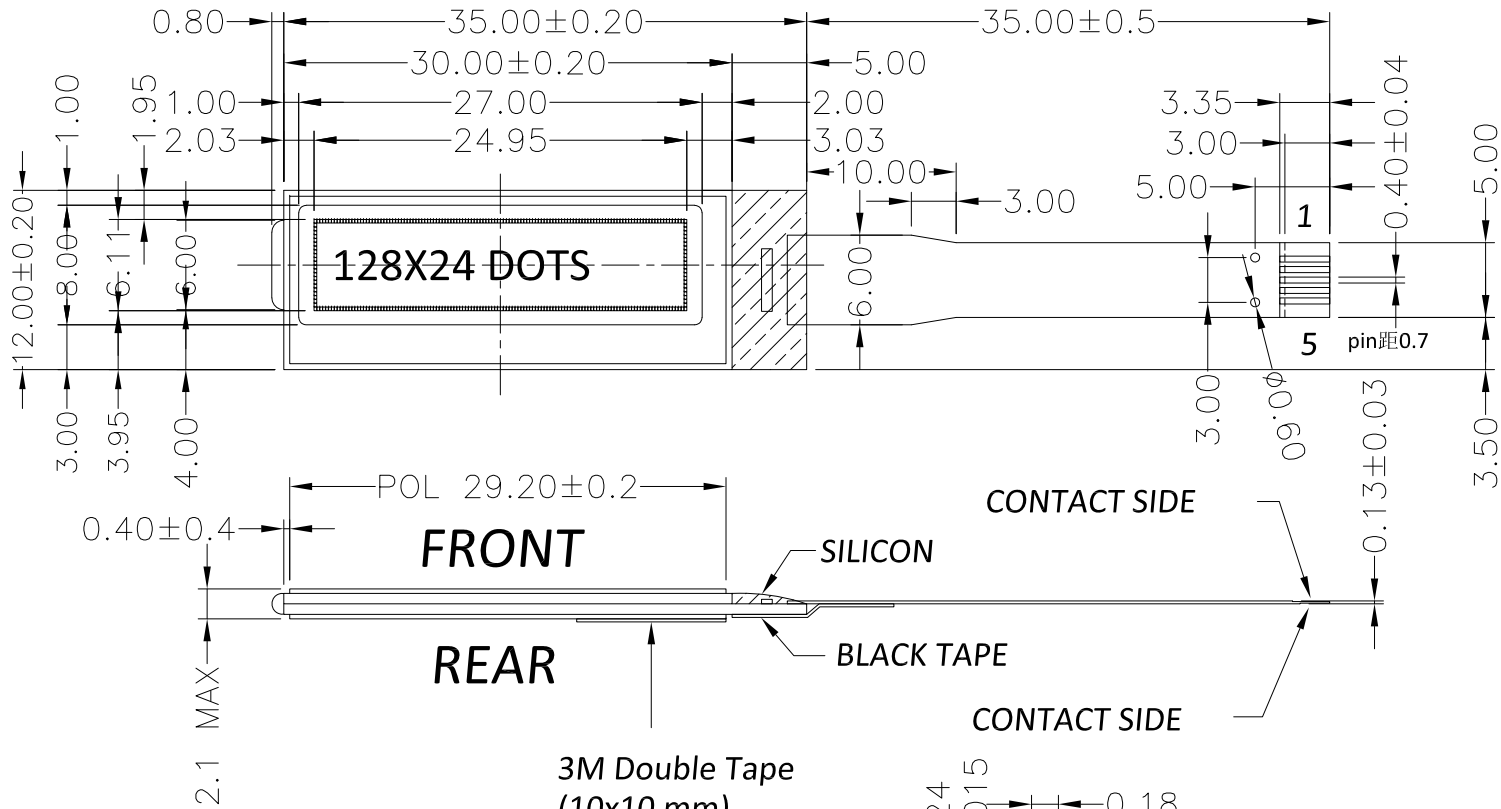


Revised Record

1.0 2017-10-30 New Issue





PIN	SYMBOL
1	RSTB
2	SCL
3	SDA
4	VDD
5	VSS



**SPECIFICATIONS:**

- |                           |   |
|---------------------------|---|
| 1. DISPLAY TYPE:          | STN / GRAY / POSITIVE / REFLECTIVE            |
| 2. DRIVE IC:              | ST7567S                                       |
| 3. OPERATING VOLTAGE:     | V <sub>lcd</sub> =6.0V; V <sub>dd</sub> =3.0V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C                                 |
| 5. STORAGE TEMPERATURE:   | -30°C ~ +80°C                                 |
| 6. DRIVE MODE:            | 1/33DUTY, 1/6BIAS                             |
| 7. BACKLIGHT:             | None  |
| 8. VIEWING ANGLE:         | 12 O'CLOCK                                    |
| 9. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT                        |

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BG12824-03</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2017-10-30