



PIN	SYMBOL
1	VG
2	GND
3	VDD
4	SDI
5	SCLK
6	A0
7	/RES
8	/CS1
9	LEDA
10	LEDK

### SPECIFICATIONS:

- |                           |                                     |
|---------------------------|-------------------------------------|
| 1. DISPLAY TYPE:          | STN / POSITIVE (Y-G) / TRANSMISSIVE |
| 2. DRIVE IC:              | ST7567-G4 or EQV.                   |
| 3. CONNECTOR:             | FLEX CABLE                          |
| 4. OPERATING VOLTAGE:     | VOP = 6.5V, VDD = 3.3V              |
| 5. OPERATING TEMPERATURE: | -10 ~ 60°C                          |
| 6. STORAGE TEMPERATURE:   | -20 ~ 70°C                          |
| 7. DRIVE MODE:            | 1/33 DUTY, 1/6 BIAS                 |
| 8. VIEWING ANGLE:         | 6 O'CLOCK                           |
| 9. BACKLIGHT:             | YELLOW-GREEN LED                    |
| 10. CUSTOMER PART NO.:    | BOCEN STANDARD PRODUCT              |



### LCD LAYOUT:

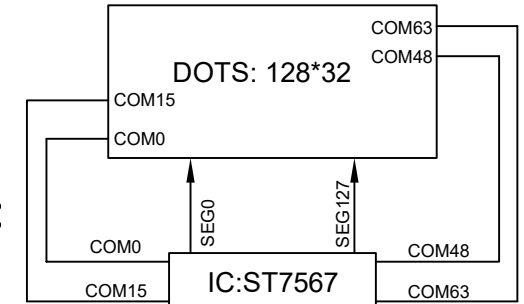


## BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

**BG12832-14**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2016-3-11