







PIN	SYMBOL	PIN	SYMBOL
1	/CS1	15	VSS
2	/RES	16	VOUT
3	A0	17	CAP3P
4	/WR(R/W)	18	CAP1N
5	/RD(E)	19	CAP1P
6	D0	20	CAP2P
7	D1	21	CAP2N
8	D2	22	V4
9	D3	23	V3
10	D4	24	V2
11	D5	25	V1
12	D6	26	V0
13	D7	27	C86
14	VDD	28	P/S

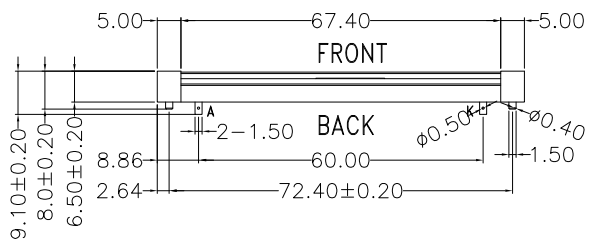

**SPECIFICATIONS:**

- DISPLAY TYPE: FSTN / B-W / POSITIVE/ TRANSFLECTIVE
- DRIVE IC: ST7565R-G
- OPERATING VOLTAGE: Vop=9.0V; Vdd=3V
- OPERATING TEMPERATURE: -20°C ~ +70°C
- STORAGE TEMPERATURE: -20°C ~+70°C
- DRIVE MODE: 1/65DUTY, 1/9BIAS
- VIEWING ANGLE: 12 O'CLOCK
- BACKLIGHT: 4PCS WHITE LEDS, IF=60mA, VF=3.2V
- CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BG12864-04</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2012-10-31