

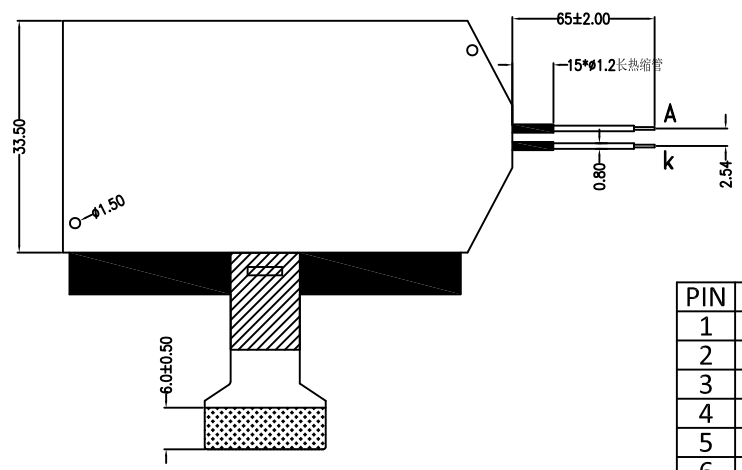
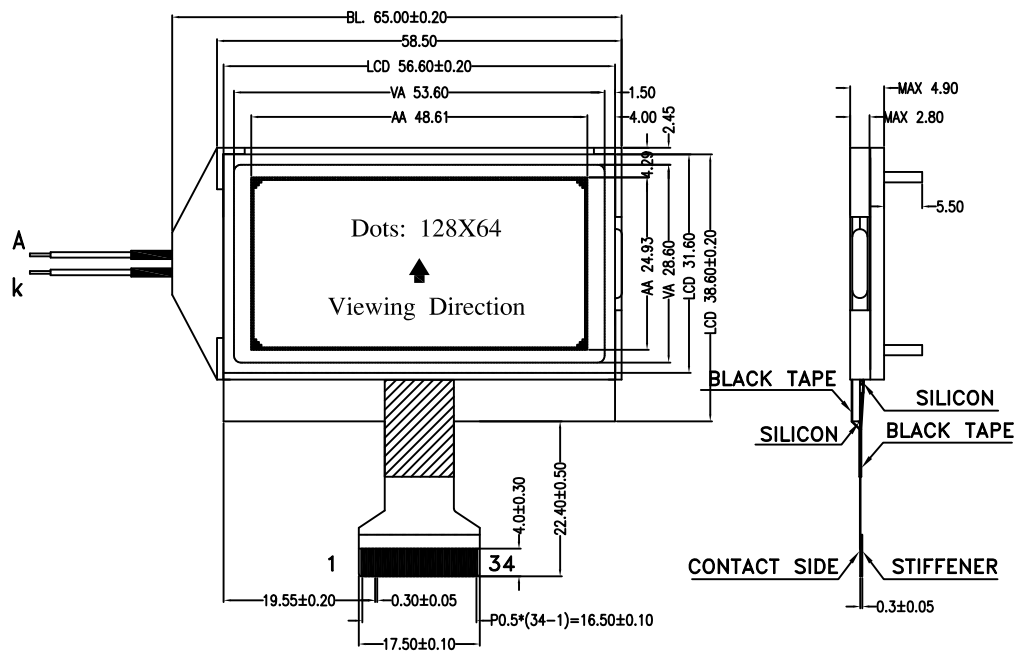


Version	1.0	2012-03-27	New Issue				
---------	-----	------------	-----------	--	--	--	--



PIN	SYMBOL	PIN	SYMBOL
1	NC	18	VO
2	CS1B	19	XV0
3	/RES	20	NC
4	A0	21	NC
5	NC	22	NC
6	NC	23	NC
7	NC	24	VG
8	NC	25	NC
9	NC	26	NC
10	NC	27	NC
11	NC	28	NC
12	NC	29	NC
13	D6(SCLK)	30	NC
14	D7(SDA)	31	NC
15	VDD	32	NC
16	VSS	33	NC
17	NC	34	NC



**SPECIFICATIONS:**

- 1. DISPLAY TYPE: STN / Y-G / POSITIVE / TRANSMISSIVE
- 2. DRIVE IC: ST7567
- 3. OPERATING VOLTAGE: VOP = 8.2 V, VDD =2.8V
- 4. OPERATING TEMPERATURE: -10 ~ +60°C
- 5. STORAGE TEMPERATURE: -20 ~ +70°C
- 6. DRIVE MODE: 1/64 DUTY, 1/7 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. BACKLIGHT: 1PCS GREEN LED, IF = 20mA, VF =3.1V
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

<b>BOCEN DISPLAY TECHNOLOGY CO., LTD.</b>		
DESIGNED BY: Shawn	<b>BG12864-08</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2012-03-27