




PIN	SYMBOL
1	/CS1
2	/RES
3	AO
4	/WR
5	/RD
6~13	DB0~DB7
14	VDD
15	VSS
16	VOUT
17	CAP3+
18	CAP1-
19	CAP1+
20	CAP2+
21	CAP2-
22	V4
23	V3
24	V2
25	V1
26	V0
27	C86
28	P/S

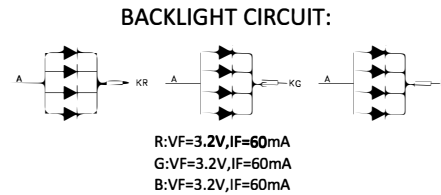

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: FSTN / POSITIVE / TRANSFLECTIVE
- 2. DRIVE IC: ST7565R or EQV.
- 3. CONNECTOR: FPC
- 4. OPERATING VOLTAGE: VOP = 9.0V, VDD = 3.0V
- 5. OPERATING TEMPERATURE: -20 ~ 70°C
- 6. STORAGE TEMPERATURE: -30 ~ 80°C
- 7. DRIVE MODE: 1/65 DUTY, 1/9 BIAS
- 8. VIEWING ANGLE: 6 O'CLOCK
- 9. BACKLIGHT: RGB LED 4 PCS, Vf=3.2V, If = 60mA
- 10. CUSTOMER PART NO.: BOCEN STANDARD PRODUCTS

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Shawn	<b>BG12864-04RGB</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2021-1-20