



PIN	SYMBOL	PIN	SYMBOL
1	NC	18	VO
2	CS1B	19	XV0
3	/RES	20	NC
4	A0	21	NC
5	/WR	22	NC
6	/RD	23	NC
7	D0	24	VG
8	D1	25	NC
9	D2	26	NC
10	D3	27	NC
11	D4	28	NC
12	D5	29	NC
13	D6(SCLK)	30	C86
14	D7(SDA)	31	PS
15	VDD	32	NC
16	VSS	33	NC
17	NC	34	NC



DOTS SIDE SCALE 20:1

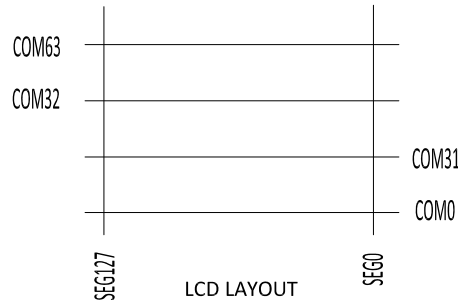

COM & SEG LAYOUT

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: STN / Y-G / POSITIVE / TRANSMISSIVE
- 2. DRIVE IC: ST7567
- 3. OPERATING VOLTAGE: VOP = 8.2V, VDD = 2.8V
- 4. OPERATING TEMPERATURE: -10 ~ +60°C
- 5. STORAGE TEMPERATURE: -20 ~ +70°C
- 6. DRIVE MODE: 1/64 DUTY, 1/7 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. BACKLIGHT: 1PCS GREEN LED, IF =15mA, VF =3.0V
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BG12864-25</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2011-04-06