


Version

1.0

2015-08-15

New Issue

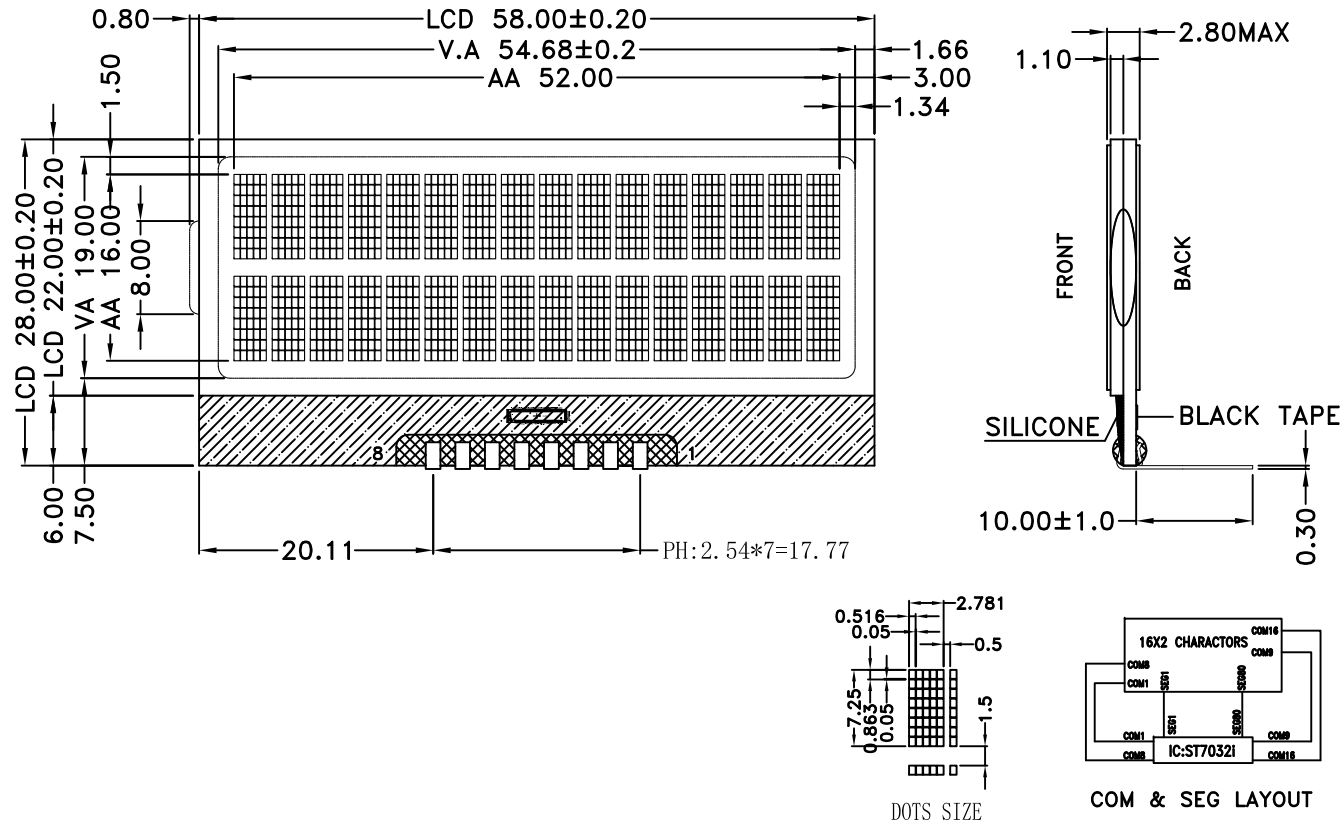

PIN	SYMBOL
1	XRESET
2	DB6(SCL)
3	DB7(SDA)
4	VSS
5	VDD
6	C1+
7	C1-
8	VOUT

SPECIFICATIONS:

- | | |
|---------------------------|--------------------------------------|
| 1. DISPLAY TYPE: | STN / GRAY / POSITIVE/ TRANSFLECTIVE |
| 2. DRIVE IC: | ST7032I |
| 3. OPERATING VOLTAGE: | Vop=5.0V; Vdd=3.0V |
| 4. OPERATING TEMPERATURE: | 0°C ~ +50°C |
| 5. STORAGE TEMPERATURE: | -10°C ~ +60°C |
| 6. DRIVE MODE: | 1/16 DUTY, 1/5 BIAS |
| 7. VIEWING ANGLE: | 12 O'CLOCK |
| 8. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BG1602-19

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 3

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2015-08-15