

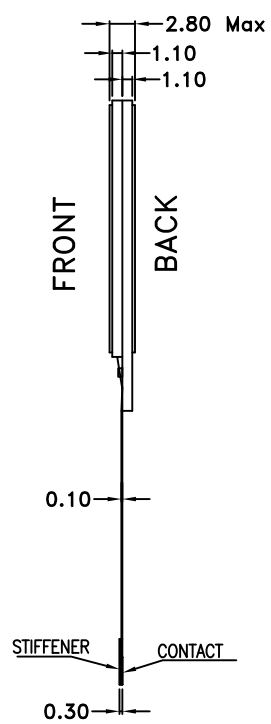
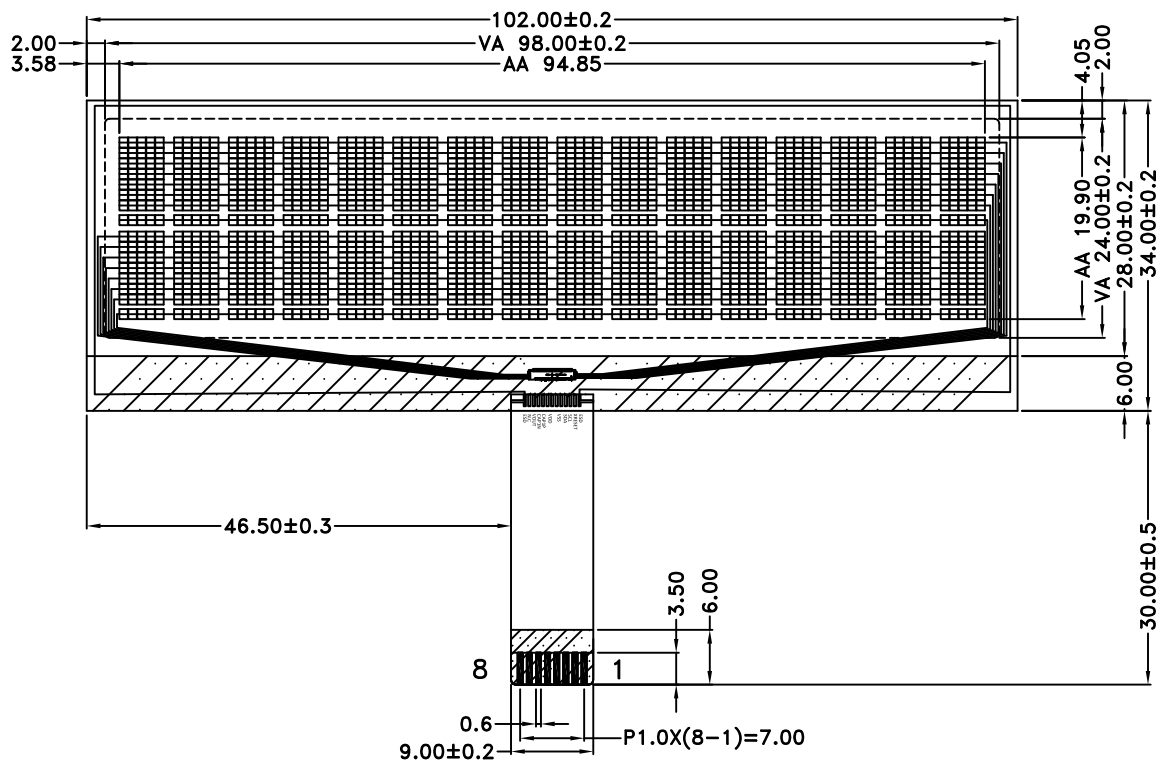


Version	1.0	2016-09-19	New Issue				
---------	-----	------------	-----------	--	--	--	--





PIN	SYMBOL
1	XRESET
2	DB6(SCL)
3	DB7(SDA)
4	VSS
5	VDD
6	C1+
7	C1-
8	VOUT



SPECIFICATIONS:

- | | |
|---------------------------|---|
| 1. DISPLAY TYPE: | FSTN / POSITIVE/ TRANSFLECTIVE |
| 2. DRIVE IC: | ST7032I |
| 3. OPERATING VOLTAGE: | V _{lcd} =5.0V; V _{dd} =3.3V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C |
| 5. STORAGE TEMPERATURE: | -30°C ~+80°C |
| 6. DRIVE MODE: | 1/16 DUTY, 1/5 BIAS |
| 7. VIEWING ANGLE: | 12 O'CLOCK |
| 8. BACKLIGHT: | None |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Shawn	BG1602-24	VERSION: 1.0
CHECKED BY: William	 	NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2016-09-19