

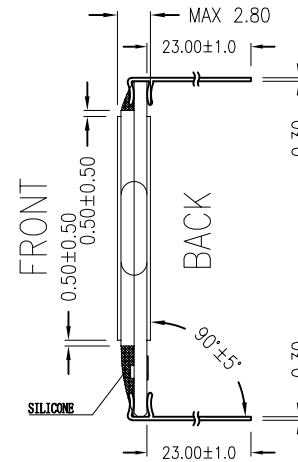


Version


1.0

2023-10-27

New Issue

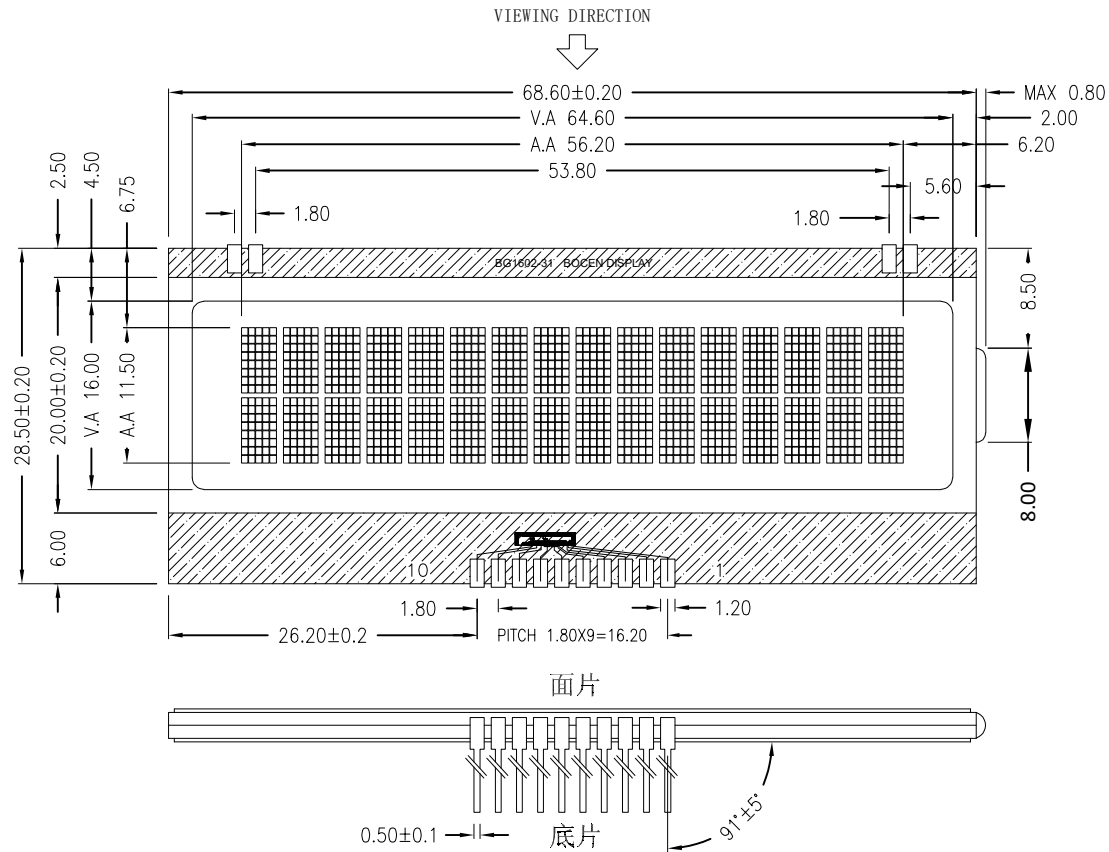

DOTS SIZE



COM & SEG LAYOUT

| PIN | SYMBOL |
|-----|--------|
| 1 | XRESET |
| 2 | RS |
| 3 | CSB |
| 4 | SCL |
| 5 | SDA |
| 6 | VSS |
| 7 | VDD |
| 8 | VOUT |
| 9 | CAP1P |
| 10 | CAP1N |

SPECIFICATIONS:

- | | |
|---------------------------|------------------------------------|
| 1. DISPLAY TYPE: | STN(Y/G) / POSITIVE/ TRANSFLECTIVE |
| 2. DRIVE IC: | ST7032-0D |
| 3. OPERATING VOLTAGE: | Vop=5.6V; Vdd=3.3V |
| 4. OPERATING TEMPERATURE: | 0°C ~ +50°C |
| 5. STORAGE TEMPERATURE: | -10°C ~+60°C |
| 6. DRIVE MODE: | 1/16 DUTY, 1/4 BIAS |
| 7. VIEWING ANGLE: | 12 O'CLOCK |
| 8. BACKLIGHT: | -- |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BG1602-31

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2023-10-27