
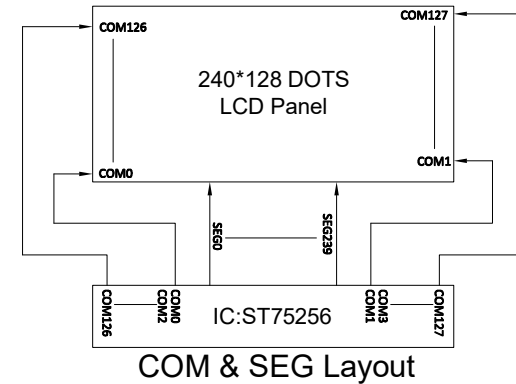

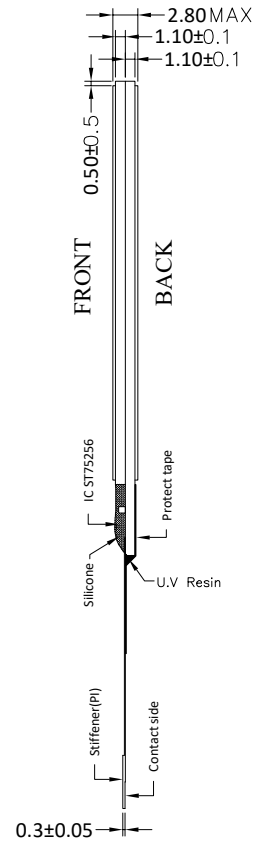


|         |     |            |           |  |  |  |  |
|---------|-----|------------|-----------|--|--|--|--|
| Version | 1.0 | 2021-11-29 | New Issue |  |  |  |  |
|---------|-----|------------|-----------|--|--|--|--|


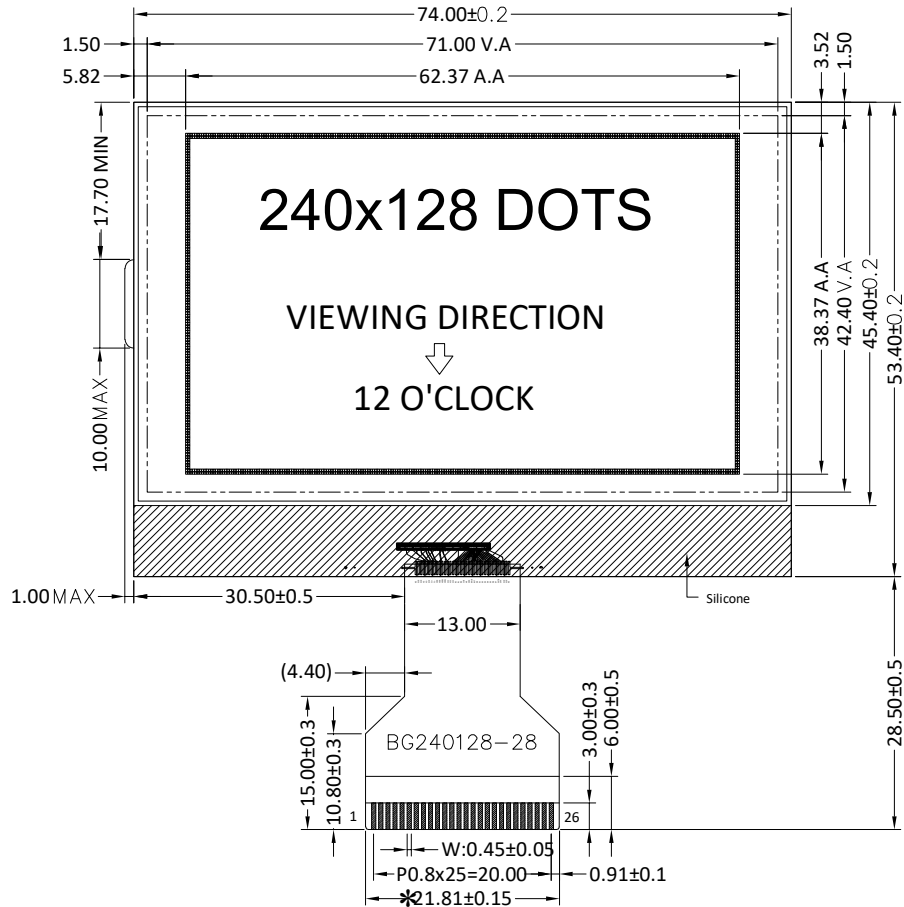


| PIN | NAME |
|-----|------|
| 1   | VG   |
| 2   | V0   |
| 3   | XV0  |
| 4   | CA1P |
| 5   | CA1N |
| 6   | VDD  |
| 7   | VDD  |
| 8   | NC   |
| 9   | VSS  |
| 10  | VSS  |
| 11  | IF2  |
| 12  | IF1  |
| 13  | IF0  |
| 14  | CSB  |
| 15  | A0   |
| 16  | ERD  |
| 17  | RWR  |
| 18  | RSTB |
| 19  | DB0  |
| 20  | DB1  |
| 21  | DB2  |
| 22  | DB3  |
| 23  | DB4  |
| 24  | DB5  |
| 25  | DB6  |
| 26  | DB7  |

### SPECIFICATIONS:

- |                           |                                 |
|---------------------------|---------------------------------|
| 1. DISPLAY TYPE:          | FSTN / POSITIVE / TRANSFLECTIVE |
| 2. DRIVE IC:              | ST75256                         |
| 3. OPERATING VOLTAGE:     | Vdd=3.3V; Vlcd=13.0V            |
| 4. OPERATING TEMPERATURE: | -25°C ~ +70°C                   |
| 5. STORAGE TEMPERATURE:   | -30°C ~+ 80°C                   |
| 6. DRIVE MODE:            | 1/128 DUTY, 1/12 BIAS           |
| 7. VIEWING ANGLE:         | 12 O'CLOCK                      |
| 8. BACKLIGHT:             | NO                              |
| 9. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT          |

## BOCEN DISPLAY TECHNOLOGY CO., LTD.

|  |   |                  |
|--|---|------------------|
| DESIGNED BY: Sylar   | <b>BG240128-28</b>  | VERSION: 1.0     |
| CHECKED BY: William  |  | NO.: 1 OF 1      |
| APPROVED BY: Rio   |  | UNIT: mm         |
| Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a> |   | DATE: 2021-11-29 |