



PIN	SYMBOL
1	LED-K
2	LED-A
3	GND
4	VCC 2.8V
5	GND
6	IOVCC 1.8V
7	GND
8	D15
9	D14
10	D13
11	D12
12	D11
13	D10
14	D9
15	D8
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	RD
25	WR
26	RS
27	CS
28	RST
29	NC
30	NC

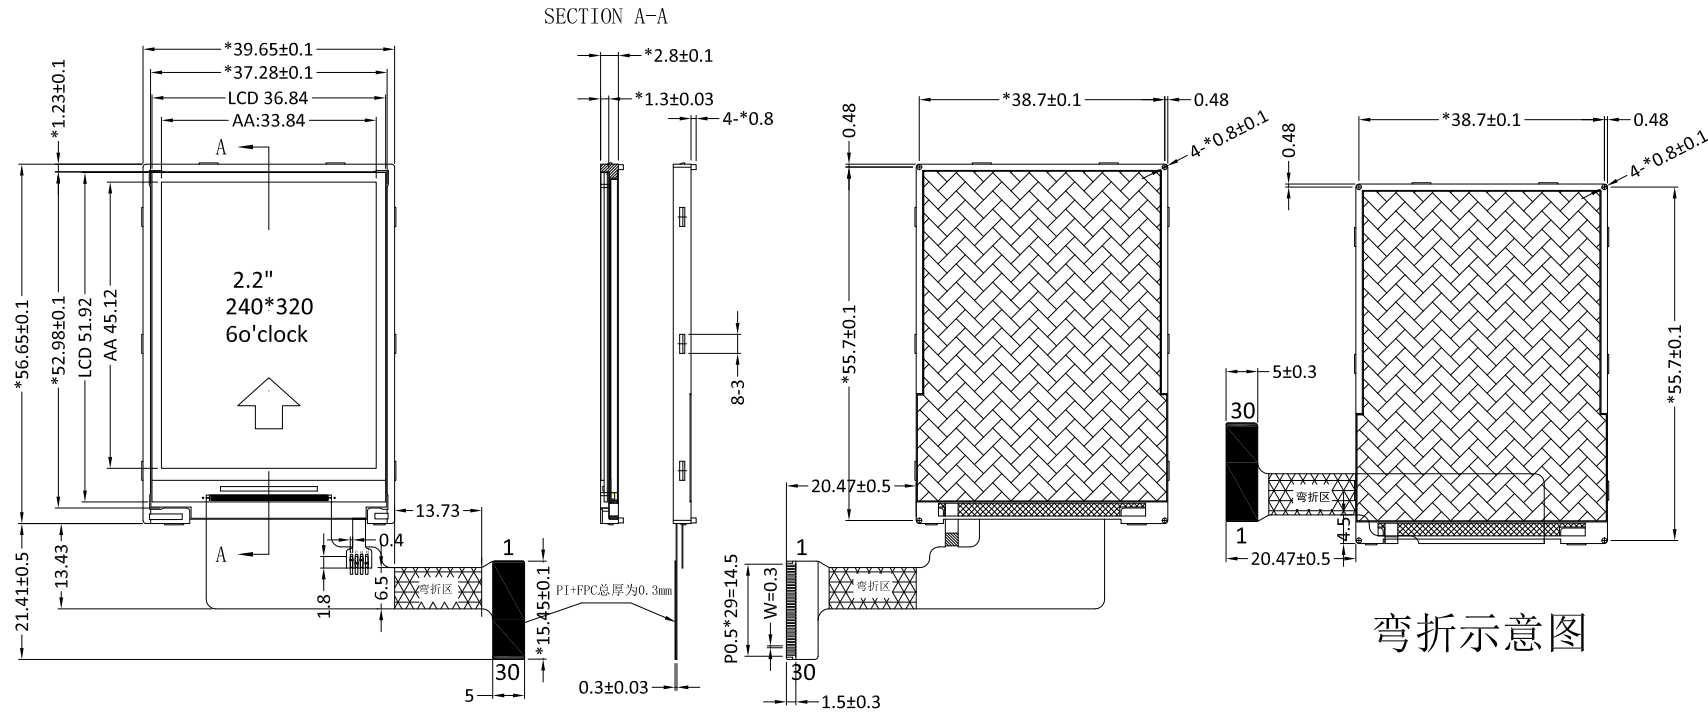

SPECIFICATIONS:

- 1. DISPLAY TYPE: 2.2"/ TN / 240*320
- 2. DRIVE IC: ST7789V OR ILI9341V
- 3. OPERATING TEMPERATURE: -20 ~ 60°C
- 4. STORAGE TEMPERATURE: -30 ~ 70°C
- 5. VIEWING ANGLE: 6 O'CLOCK
- 6. BACKLIGHT: 4 WHITE LED, IF=12V,VF=20mA
- 7. BRIGHTNESS: --
- 8. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT



LED CIRCUIT:

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: David	BF2230-01	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2015-05-22