
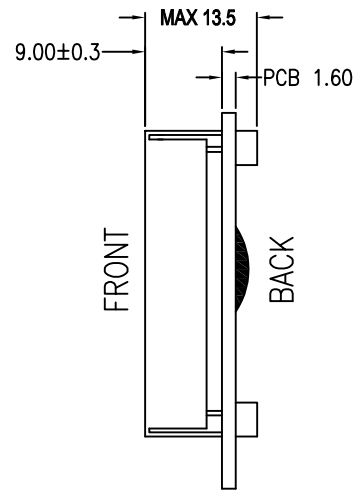




Version	1.0	2023.09.28	New Issue				

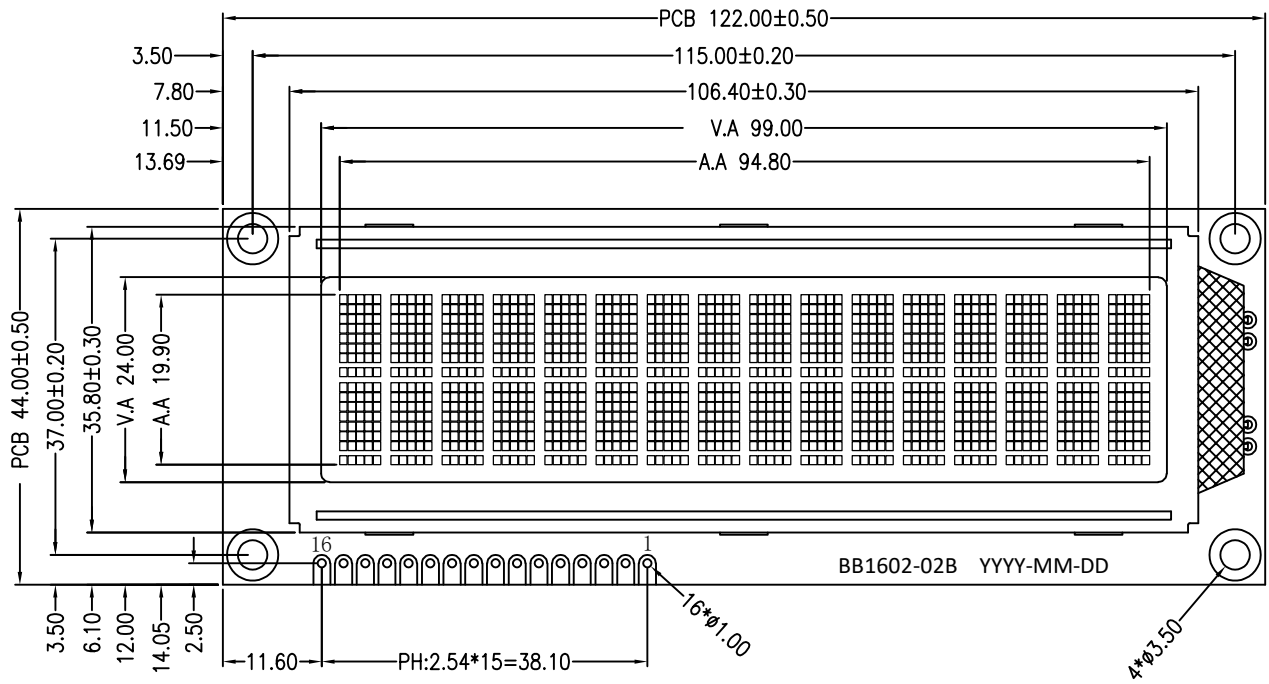

PIN	SYMBOL
1	LED-K
2	LED-A(5V)
3	VSS
4	VDD(5V)
5	V0
6	RS
7	RW
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7

SPECIFICATIONS:

- 1. DISPLAY TYPE: VA / NEGATIVE / TRANSMISSIVE (UV)
- 2. DRIVE IC: AIP31066W2(EN-EU)
- 3. OPERATING VOLTAGE: Vop=9V; Vdd=5.0V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -30°C ~+ 80°C
- 6. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
- 7. VIEWING ANGLE: 12 O'CLOCK
- 8. BACKLIGHT: WHITE LED VF=5V, IF=30mA
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Sylar	BB1602-02B	VERSION: 1.0
CHECKED BY: William	 	NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2023.09.28