

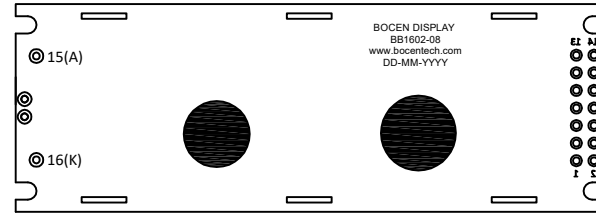
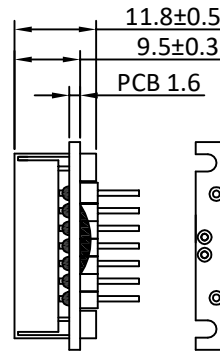
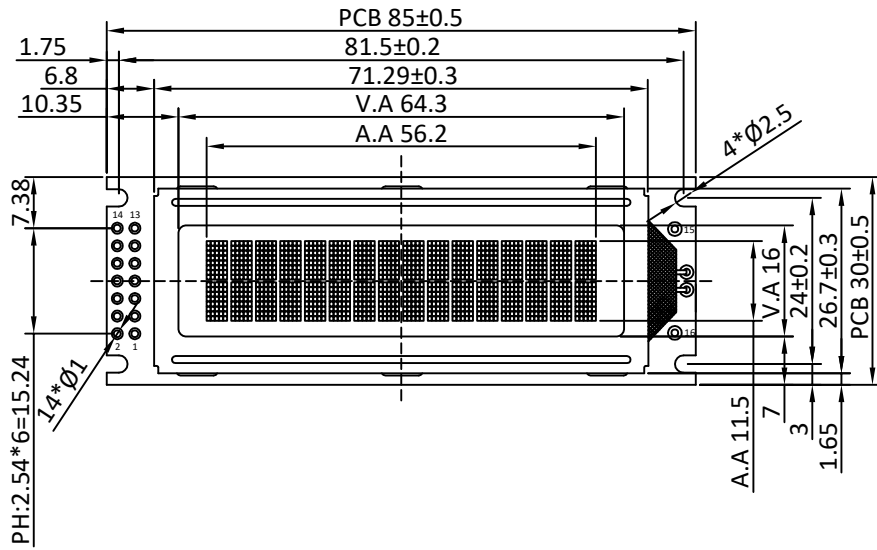


Version

1.0 2022-11-9 New Issue



INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

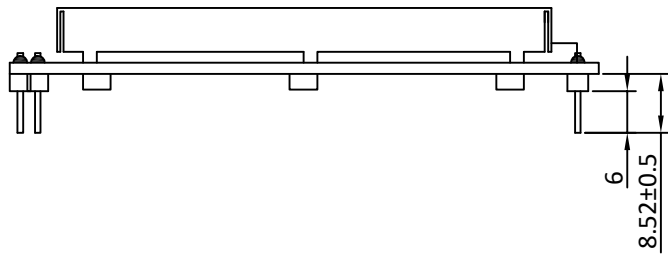

SPECIFICATIONS:

- 1. DISPLAY TYPE: STN (Y-G) / POSITIVE/ TRANSMISSIVE
- 2. DRIVE IC: AIP31066W2 (ENGLISH/EUROEPAN)
- 3. OPERATING VOLTAGE: VOP = 4.2 V, VDD = 5.0V
- 4. OPERATING TEMPERATURE: -20 ~ 70°C
- 5. STORAGE TEMPERATURE: -25 ~ 80°C
- 6. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. BACKLIGHT: Y-G, I = 15mA
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BB1602-08	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2022-11-9