



Version

1.0 2013-11-11 New Issue

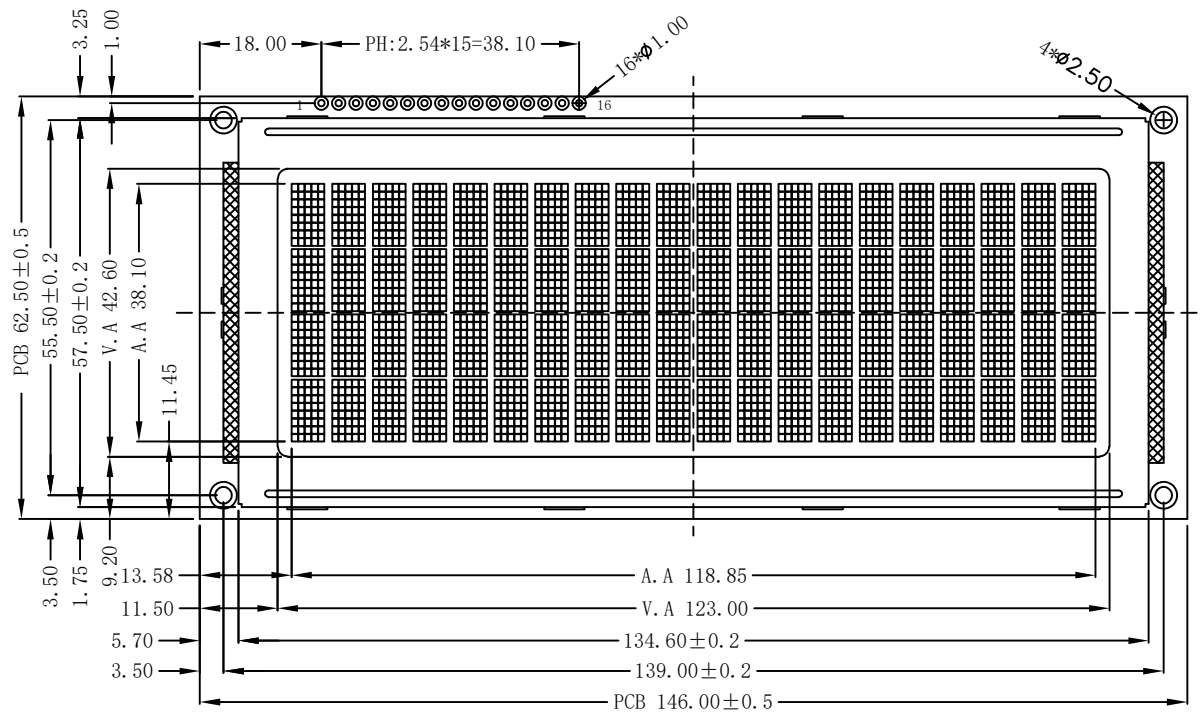

14.00 ± 0.3
9.40 ± 0.3
PCB 1.60



INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

SPECIFICATIONS:

- DISPLAY TYPE: STN / POSITIVE (YELLOW-GREEN) / TRANSFLECTIVE
- DRIVE IC: AIP31066 or EQV.
- CONNECTOR: ZEBRA
- OPERATING VOLTAGE: VOP = 4.7 V, VDD = 5.0V
- OPERATING TEMPERATURE: -20 ~ 70°C
- STORAGE TEMPERATURE: -30 ~ 80°C
- DRIVE MODE: 1/16 DUTY, 1/5 BIAS
- VIEWING ANGLE: 6 O'CLOCK
- BACKLIGHT: YELLOW-GREEN LED, I = 120mA
- CUSTOMER PART NO.: BOCEN STANDARD PRODUCT


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BB2004-03

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2013-11-11