


Version	1.0	2022-02-21	New Issue				

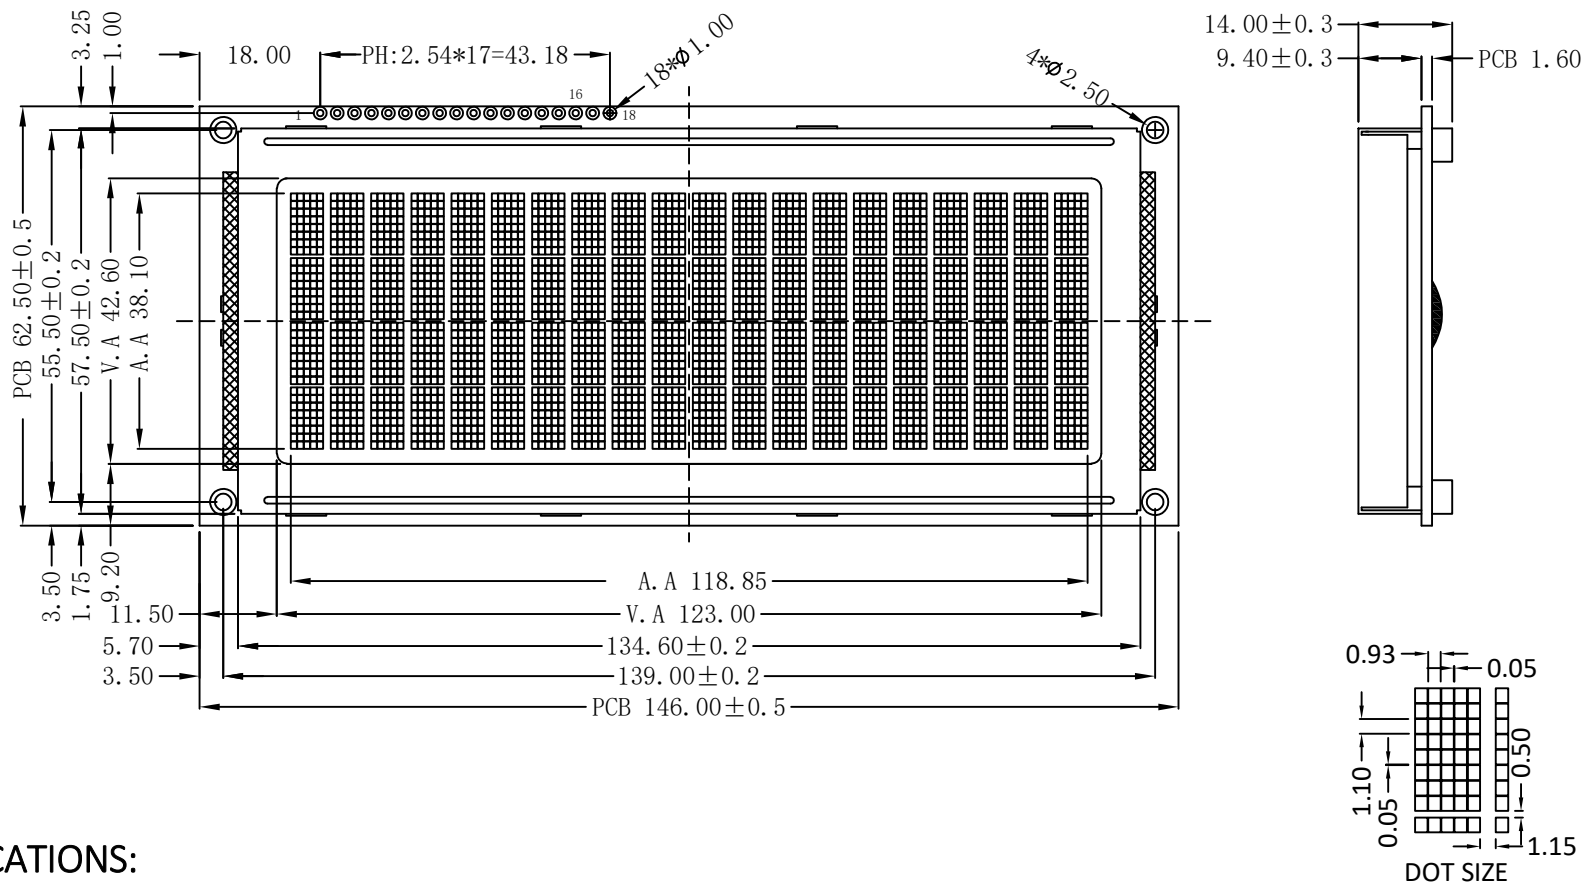

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K
17	NC
18	NC

**SPECIFICATIONS:**

- |                           |                                      |
|---------------------------|--------------------------------------|
| 1. DISPLAY TYPE:          | STN / NEGATIVE (BLUE) / TRANSMISSIVE |
| 2. DRIVE IC:              | AIP31066+AIP31065                    |
| 3. CONNECTOR:             | ZEBRA                                |
| 4. OPERATING VOLTAGE:     | VOP = 4.7 V, VDD = 5.0V              |
| 5. OPERATING TEMPERATURE: | -20 ~ 70°C                           |
| 6. STORAGE TEMPERATURE:   | -30 ~ 80°C                           |
| 7. DRIVE MODE:            | 1/16 DUTY, 1/5 BIAS                  |
| 8. VIEWING ANGLE:         | 6 O'CLOCK                            |
| 9. BACKLIGHT:             | WHITE LED, I = 120mA                 |
| 10. CUSTOMER PART NO.:    | BOCEN STANDARD PRODUCT               |

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BB2004-03A</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2022-02-21