

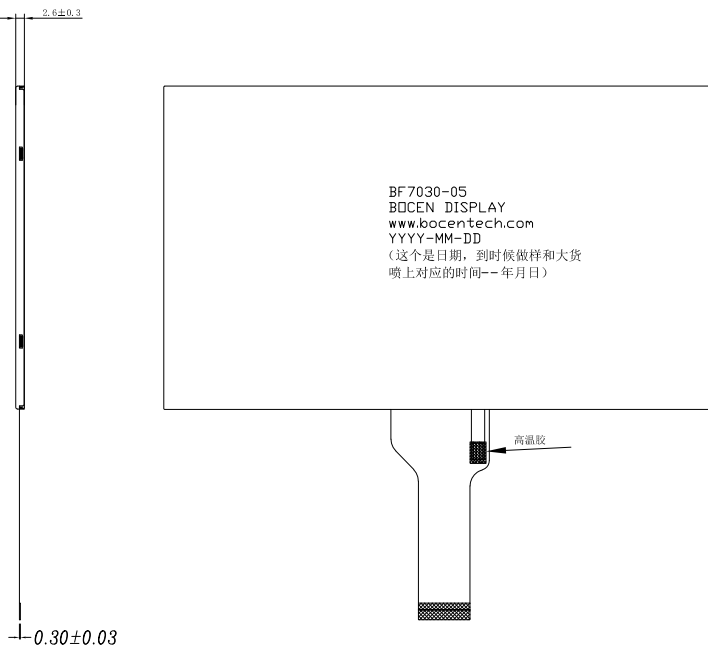


Version	1. 0	2024-01-18	New Issue						

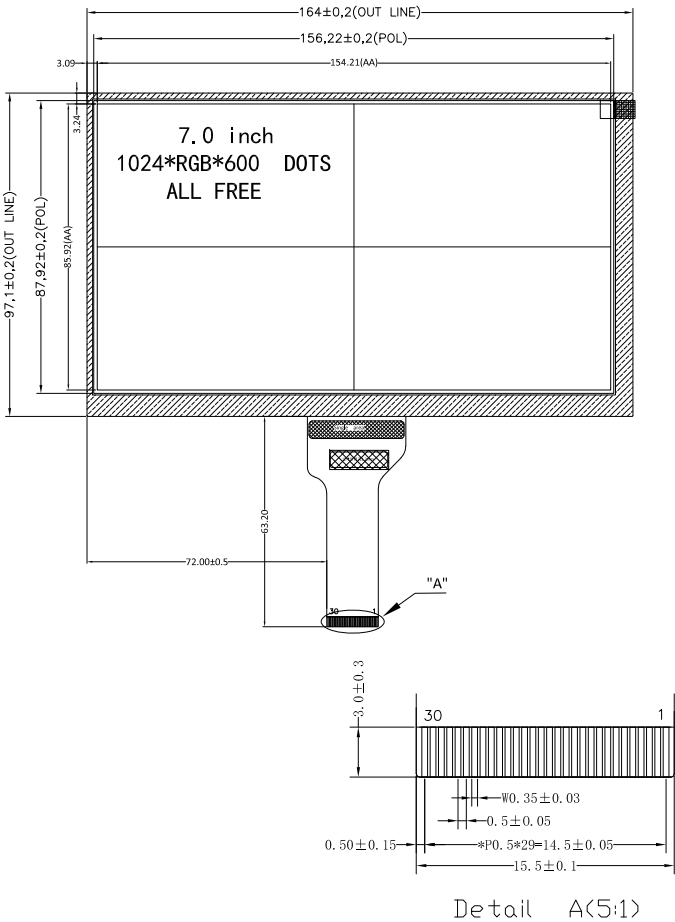

Back light CIRCUIT DIAGRAM



No	PIN NAME
1	LED+
2	LED+
3	LCD_VGH
4	LCD_VGL
5	UPDN
6	SHLR
7	LED-
8	LED-
9	AVDD
10	GND
11	MIPI_TDP3
12	MIPI_TDN3
13	GND
14	MIPI_TDP2
15	MIPI_TDN2
16	GND
17	MIPI_TCP
18	MIPI_TCN
19	GND
20	MIPI_TDP1
21	MIPI_TDN1
22	GND
23	MIPI_TDP0
24	MIPI_TDN0
25	GND
26	STBYB
27	RSTB
28	VDD
29	VDD
30	VCOM

SPECIFICATIONS:

1. DISPLAY TYPE:
- 7.0" / 1024*600
2. DRIVE IC:
-
3. OPERATING TEMPERATURE:
- 20 ~ 70°C
4. STORAGE TEMPERATURE:
- 30 ~ 80°C
5. VIEWING ANGLE:
- ALL
6. BACKLIGHT:
- 24 WHITE LED, 9V, 160mA
7. BRIGHTNESS:
- 350 CD/M2 (TYP.)
8. CUSTOMER PART NO.:
- BOCEN STANDARD PRODUCT



BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

CHECKED BY: William

APPROVED BY: Rio

BF7030-05



VERSION: 1.0

NO.: 1 OF 1

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2024-01-18