

|    |      |
|----|------|
| 1  | VBL- |
| 2  | VBL+ |
| 3  | GND  |
| 4  | VDD  |
| 5  | R0   |
| 6  | R1   |
| 7  | R2   |
| 8  | R3   |
| 9  | R4   |
| 10 | R5   |
| 11 | R6   |
| 12 | R7   |
| 13 | G0   |
| 14 | G1   |
| 15 | G2   |
| 16 | G3   |
| 17 | G4   |
| 18 | G5   |
| 19 | G6   |
| 20 | G7   |
| 21 | B0   |
| 22 | B1   |
| 23 | B2   |
| 24 | B3   |
| 25 | B4   |
| 26 | B5   |
| 27 | B6   |
| 28 | B7   |
| 29 | GND  |
| 30 | CLK  |
| 31 | DISP |
| 32 | NC   |
| 33 | NC   |
| 34 | DE   |
| 35 | NC   |
| 36 | GND  |
| 37 | NC   |
| 38 | NC   |
| 39 | NC   |
| 40 | NC   |

## SPECIFICATIONS:

- |                           |                         |
|---------------------------|-------------------------|
| 1. DRIVE IC:              | ST7282                  |
| 2. DISPLAY TYPE:          | 4.3"/TN                 |
| 3. OPERATING TEMPERATURE: | -10 ~ 60°C              |
| 4. STORAGE TEMPERATURE:   | -20 ~ 70°C              |
| 5. VIEWING ANGLE:         | 6 o'clock               |
| 6. BACKLIGHT:             | 10 CHIP WHITE LED(40mA) |
| 7. BRIGHTNESS:            | 350cd/m <sup>2</sup>    |
| 8. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT  |


## BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

**BF4340-02C**

VERSION: 1.0

CHECKED BY: William





NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2018-5-18

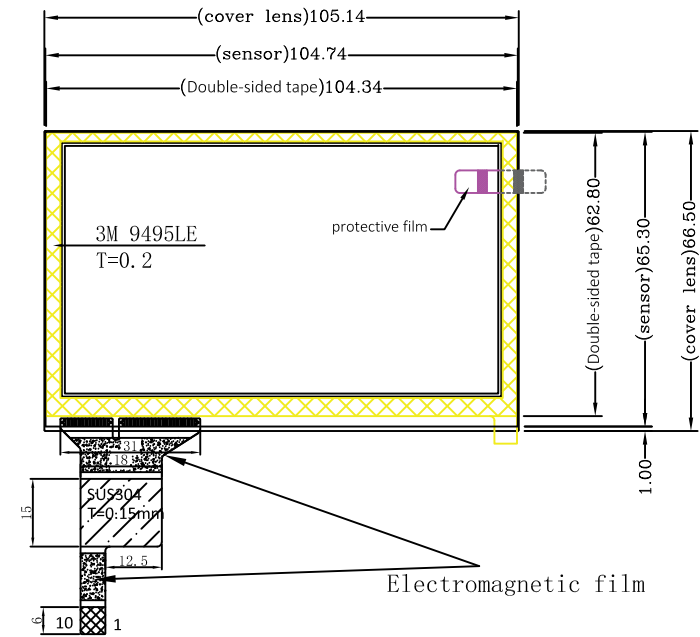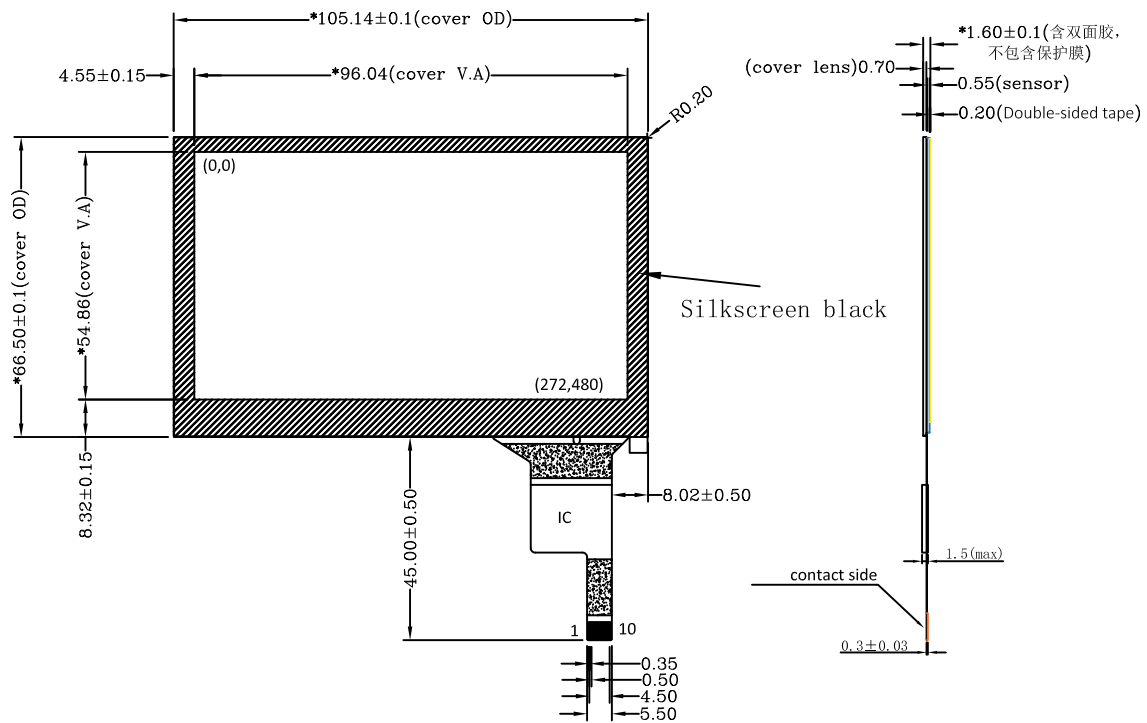

## CTP PIN

### SPECIFICATIONS:

1. DRIVE IC: FT5336
2. OPERATING TEMPERATURE: -10 ~ 60°C
3. STORAGE TEMPERATURE: -20 ~ 70°C
4. OPERATE VOLTAGE: 2.8V-3.3V

| PIN NO | DEFINITION |
|--------|------------|
| 1      | VSS        |
| 2      | VDD        |
| 3      | SCL        |
| 4      | NC         |
| 5      | SDA        |
| 6      | NC         |
| 7      | /RESET     |
| 8      | NC         |
| 9      | /INT       |
| 10     | VSS        |


## BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

**BF4340-02C**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2018-5-18