
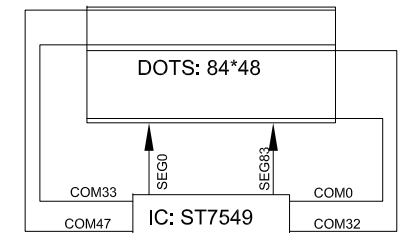



PIN	SYMBOL
1	VDD
2	RES
3	CSB
4	A0
5	SDA
6	SCLK
7	VSS
8	VLCD

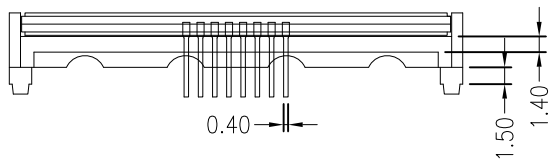

LCD LAYOUT

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: FSTN / POSITIVE / TRANSFLECTIVE
- 2. DRIVE IC: ST7549T
- 3. OPERATING VOLTAGE: Vop=8.6V; Vdd=3.3V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -10°C ~+60°C
- 6. DRIVE MODE: 1/68DUTY, 1/9BIAS
- 7. BACKLIGHT: 4PCS GREEN LEDS, IF=60mA, VF=3.3V
- 8. VIEWING ANGLE: 12 O'CLOCK
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT


**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn

**BG8448-01**

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 1

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2016-12-17