


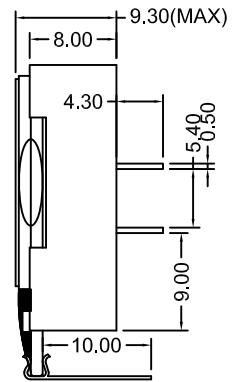


Version	1.0	2017-05-12	New Issue				
---------	-----	------------	-----------	--	--	--	--


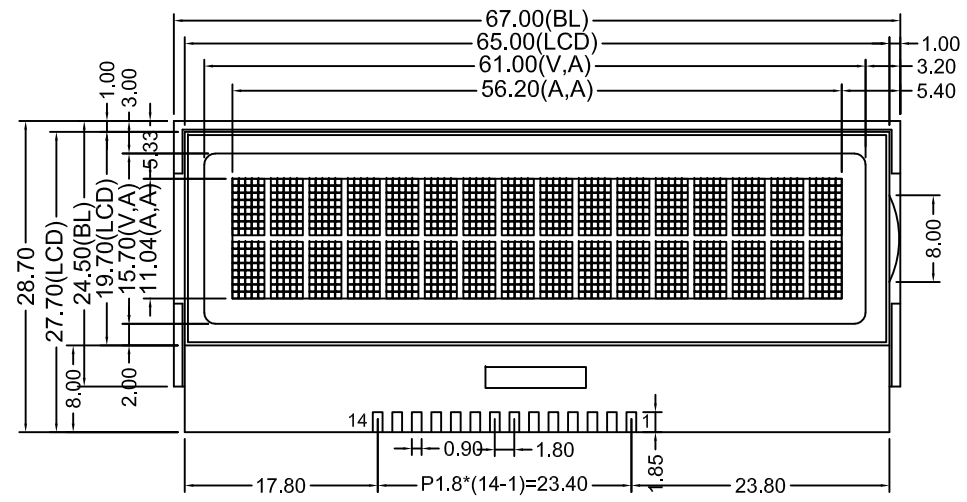


PIN	SYMBOL
1	GND
2	V0
3	VDD
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

SPECIFICATIONS:

- 1. DISPLAY TYPE: STN / Y-G / NEGATIVE / TRANSMISSIVE
- 2. DRIVE IC: NT7605
- 3. OPERATING VOLTAGE: Vop=4.5 Vdd=5V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -30°C ~+ 80°C
- 6. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. BACKLIGHT: 2PCS Y-G LEDS. IF=30mA,VF=3.10V
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BG1602-11	VERSION: 1.0
CHECKED BY: William	 	NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2017-05-12