
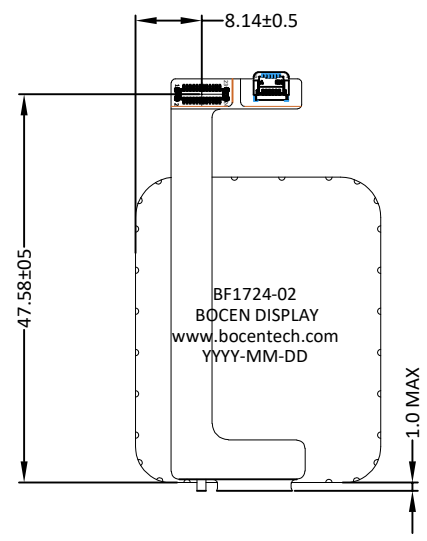
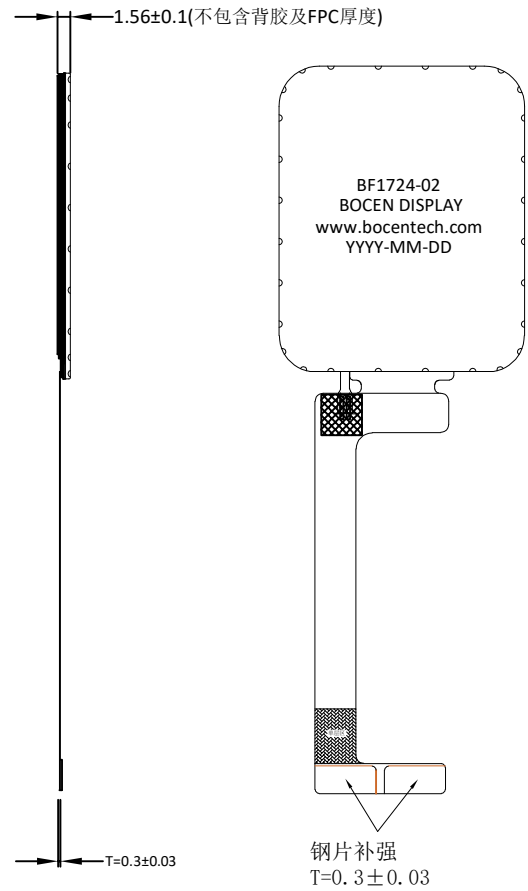


Version	1.0	2022-02-10	New Issue				

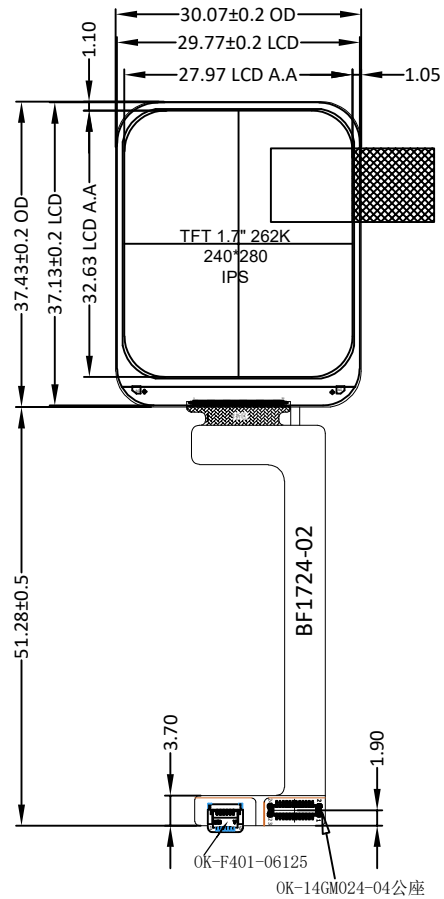

FPC弯折示意图
FPC展开出货

PIN	SYMBOL
1	TP_SDA
2	TP_INT
3	TP_SCL
4	TP_RST
5	GND
6	NC
7	GND
8	NC
9	TE
10	NC
11	LCM_SPI_MOSI
12	NC
13	LCM_SPI_RS
14	GND
15	LCM_SPI_CLK
16	NC
17	LCM_SPI_CSN
18	GND
19	RST
20	GND
21	IOVCC1.8V
22	VDD2V8
23	LCM_LED-
24	LCM_LED+


Touch Panel

PIN	SYMBOL
1	VDD2V8
2	TP_CLK
3	TP_SDA
4	TP_INT
5	TP_RST
6	GND



SPECIFICATIONS:

- 1. DISPLAY TYPE: 1.7"/ IPS / 240*260
- 2. DRIVE IC: ST7789V2
- 3. OPERATING TEMPERATURE: -20 ~ 70°C
- 4. STORAGE TEMPERATURE: -30 ~ 80°C
- 5. VIEWING ANGLE: ALL
- 6. BACKLIGHT: 3 WHITE LED, 60mA
- 7. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BACKLIGHT CIRCUIT DIAGRAM



BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: David	BF1724-02	VERSION: 1.0
CHECKED BY: William	 	NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2022-02-10