



PIN	SYMBOL
1	NC
2	VG
3	NC
4	XV0
5	V0
6	VSS
7	VSS
8	VDD
9	VDD
10	SDA
11	SCLK
12	A0
13	RSTB
14	CSB
15	NC

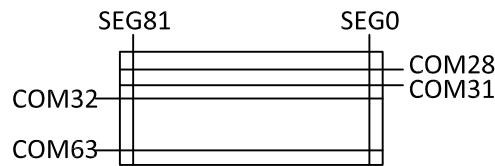

LCD DISPLAY LOGIC



SPECIFICATIONS:

- | | |
|---------------------------|--------------------------------|
| 1. DISPLAY TYPE: | FSTN / POSITIVE / TRANSMISSIVE |
| 2. DRIVE IC: | ST7567 |
| 3. OPERATING VOLTAGE: | Vlcd=6.5V; Vdd=3.3V |
| 4. OPERATING TEMPERATURE: | 0°C ~ +50°C |
| 5. STORAGE TEMPERATURE: | -10°C ~ +60°C |
| 6. DRIVE MODE: | 1/65DUTY, 1/9BIAS |
| 7. BACKLIGHT: | NONE |
| 8. VIEWING ANGLE: | 12 O'CLOCK |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |

BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn	BG8236-01	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2019-04-02