


Version

1.0

2016-10-16

New Issue

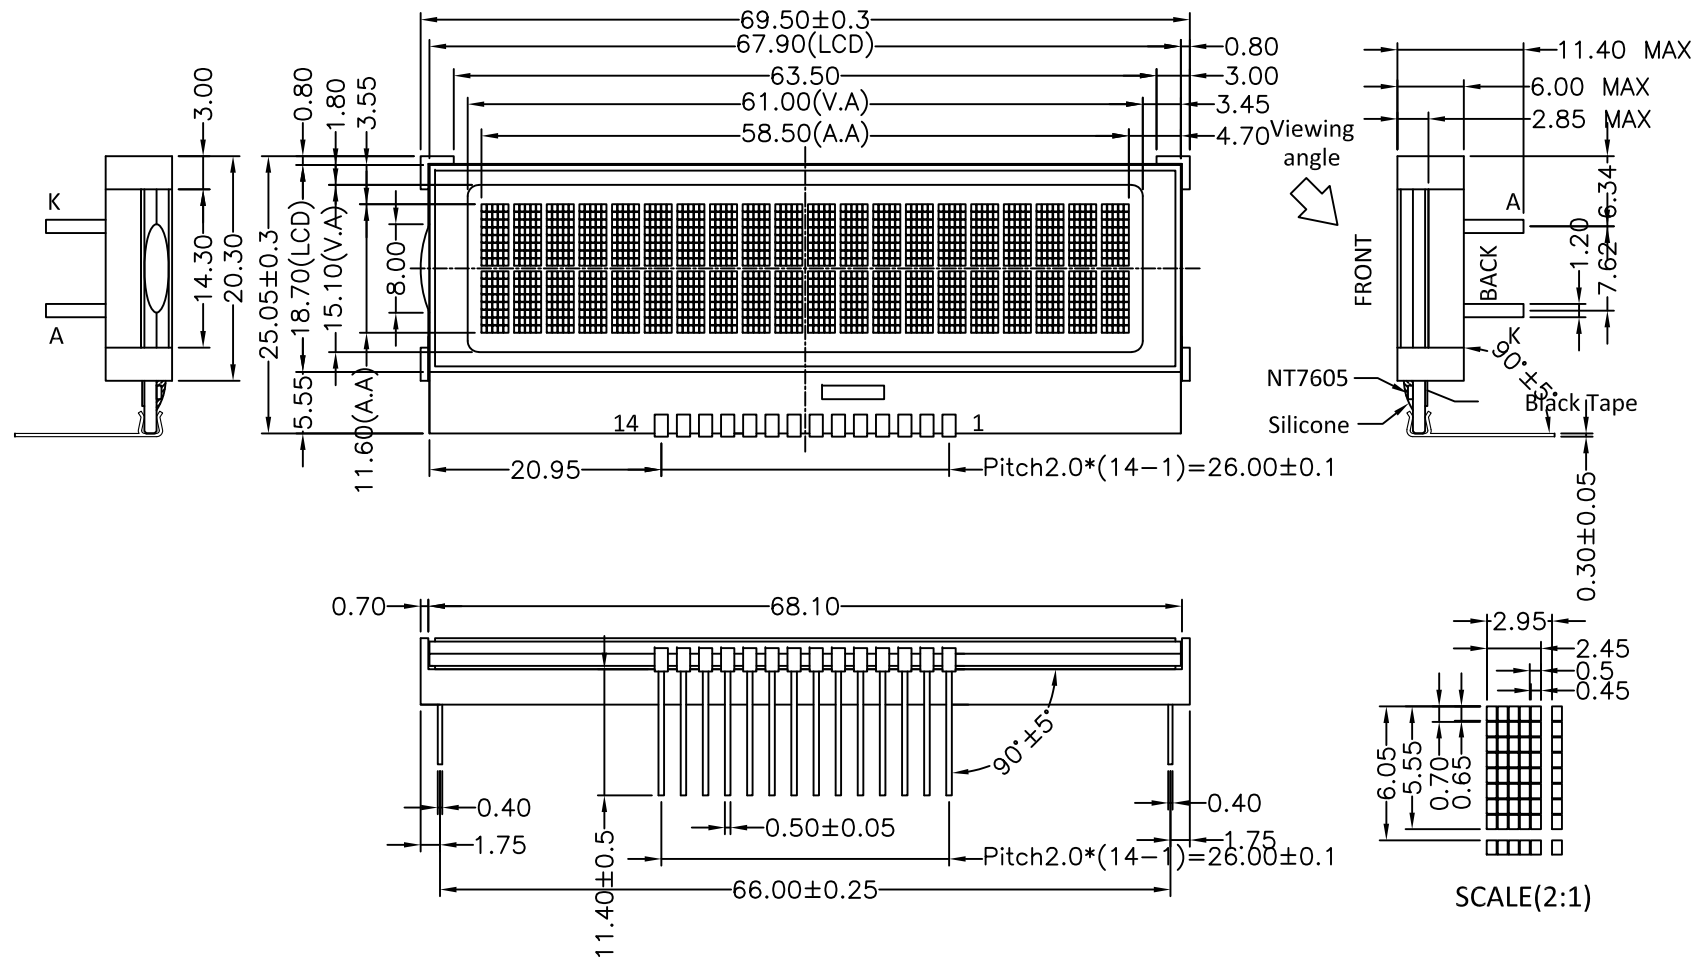

PIN	SYMBOL
1	GND
2	V5
3	VDD
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

SPECIFICATIONS:

- | | |
|---------------------------|--------------------------------------|
| 1. DISPLAY TYPE: | STN / Y-G / POSITIVE / TRANSFLECTIVE |
| 2. DRIVE IC: | NT7605 |
| 3. OPERATING VOLTAGE: | Vlcd=5V; Vdd=3.3V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +60°C |
| 5. STORAGE TEMPERATURE: | -30°C ~+ 65°C |
| 6. DRIVE MODE: | 1/16DUTY, 1/5 BIAS |
| 7. BACKLIGHT: | 4PCS Y-G LED IF=20mA, VF=4.10V |
| 8. VIEWING ANGLE: | 12 O'CLOCK |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BG2002-01

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 3

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2016-10-16