
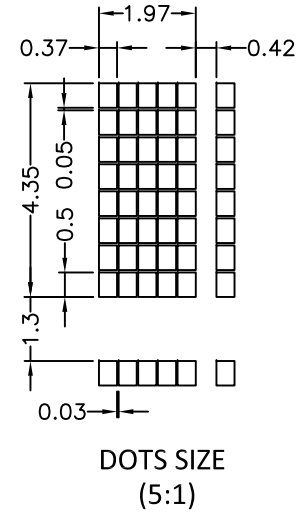
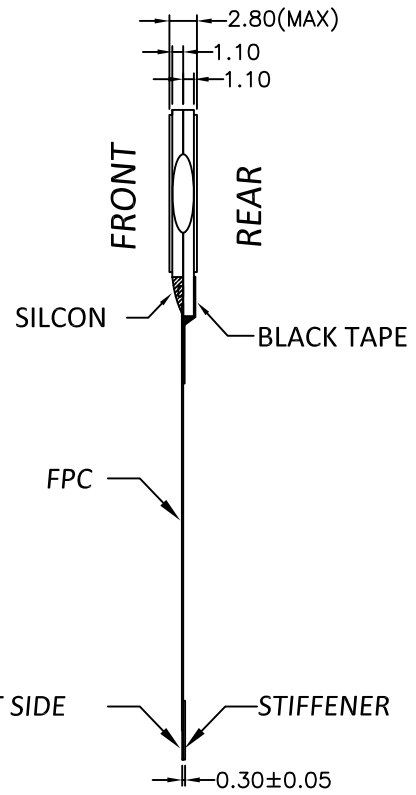



<b>Version</b>	1.0	2019-04-30	New Issue				
----------------	-----	------------	-----------	--	--	--	--

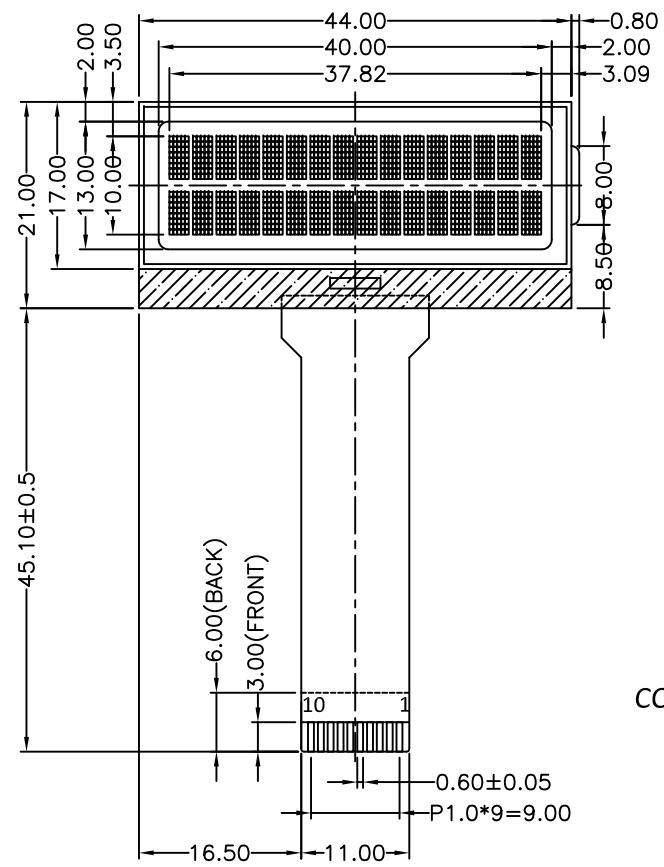

PIN	SYMBOL
1	RSTB
2	SCL
3	SDA
4	VSS
5	VDD
6	C1+
7	C1-
8	VOUT
9	V0
10	NC

**SPECIFICATIONS:**

- 1. DISPLAY TYPE: DFSTN / BLACK / NEGATIVE/ TRANSMISSIVE
- 2. DRIVE IC: ST7032I
- 3. OPERATING VOLTAGE: VLCD=5; Vdd=3.3V
- 4. OPERATING TEMPERATURE: 0°C ~ +50°C
- 5. STORAGE TEMPERATURE: -20°C ~+70°C
- 6. DRIVE MODE: 1/17 DUTY, 1/5 BIAS
- 7. VIEWING ANGLE: 12 O'CLOCK
- 8. BACKLIGHT: NONE
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

<b>BOCEN DISPLAY TECHNOLOGY CO., LTD.</b>		
DESIGNED BY: Shawn	<b>BG1602-17</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 3
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2019-04-30